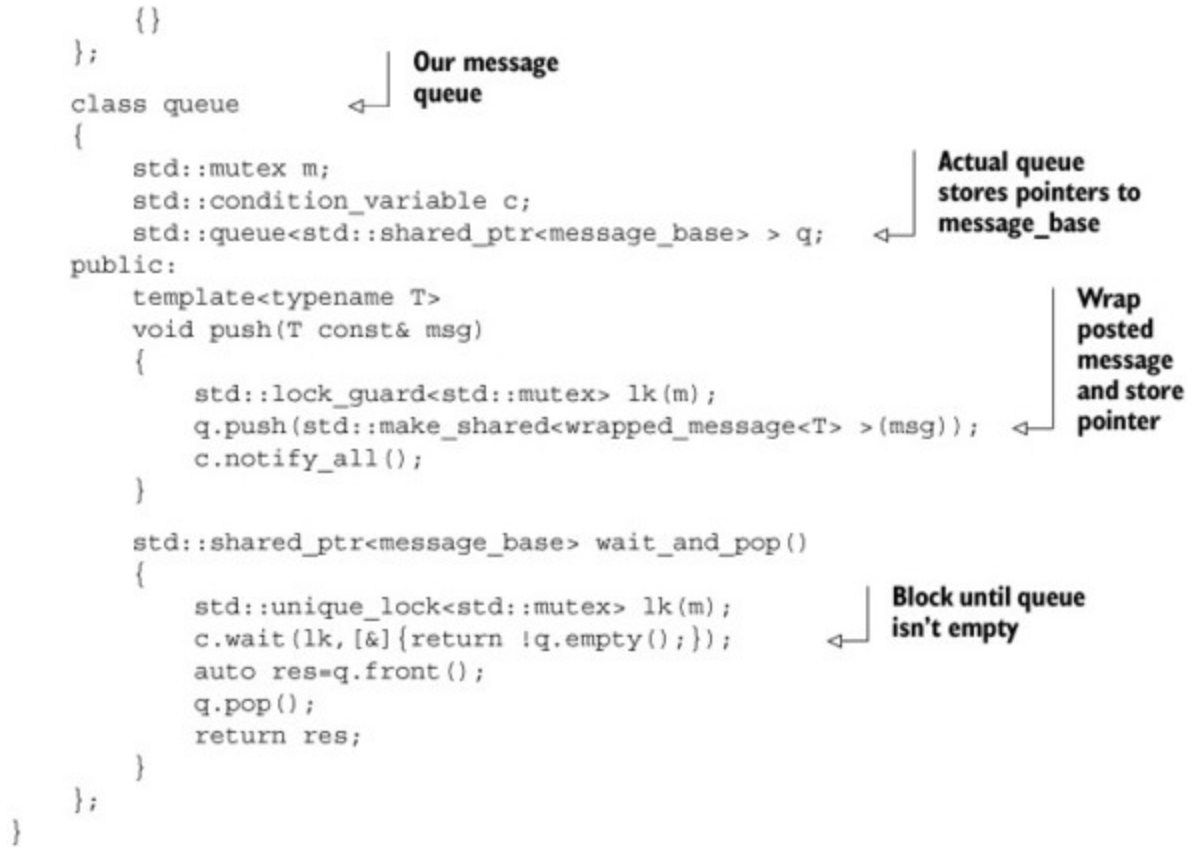


Sending messages is handled through an instance of the `sender` class shown in listing C.2. This is just a thin wrapper around a message queue that only allows messages to be pushed. Copying instances of `sender` just copies the pointer to the queue rather than the queue itself.

Listing C.2. The sender class