(continued)

Continuous deployment is similar to continuous delivery, but there's no manual approval stage. Any release candidate that passes the automated quality checks will automatically be deployed into production. The deployment process itself is often automated using tools like Chef, Puppet, or Octopus Deploy.

Both continuous delivery and continuous deployment encourage a much more streamlined, efficient deployment process. And both require a very high degree of confidence in the application's automated test suites.

In chapter 5 you saw how to express scenarios using the "Given ... When ... Then" notation. In this chapter, you'll learn how to write the test code that automates these scenarios (see figure 6.1).

In this chapter, you'll learn how to automate these scenarios:

- You can automate a scenario by writing step definitions that interpret each step in a scenario and execute the corresponding test code.
- By using different BDD tools, step definitions can be implemented in different languages, including Java (JBehave and Cucumber), JavaScript (Cucumber-JS), Python (Behave), and .NET (SpecFlow).

BDD automation libraries are all quite similar, and what's applicable to one tool can often be directly transferred to others, with one minor caveat. The "Given ... When ... Then" format you learned in chapter 5 is often referred to as *Gherkin syntax*. For the purists, this isn't strictly accurate: Gherkin is the syntax used by Cucumber and by the ports of Cucumber in different languages. JBehave has its own syntax, which was developed independently and has a few minor differences.

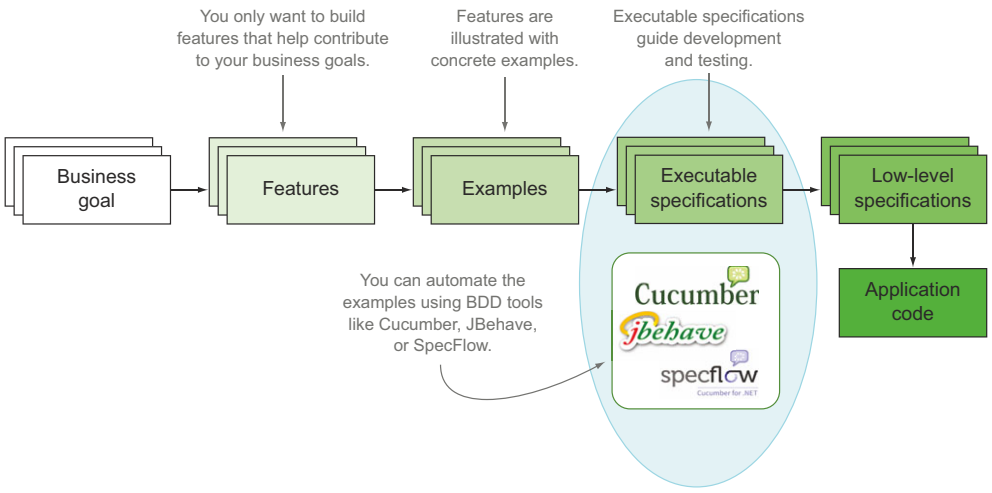


Figure 6.1 In this chapter we'll concentrate on how you can automate the executable specifications using BDD tools like JBehave, Cucumber, and SpecFlow.