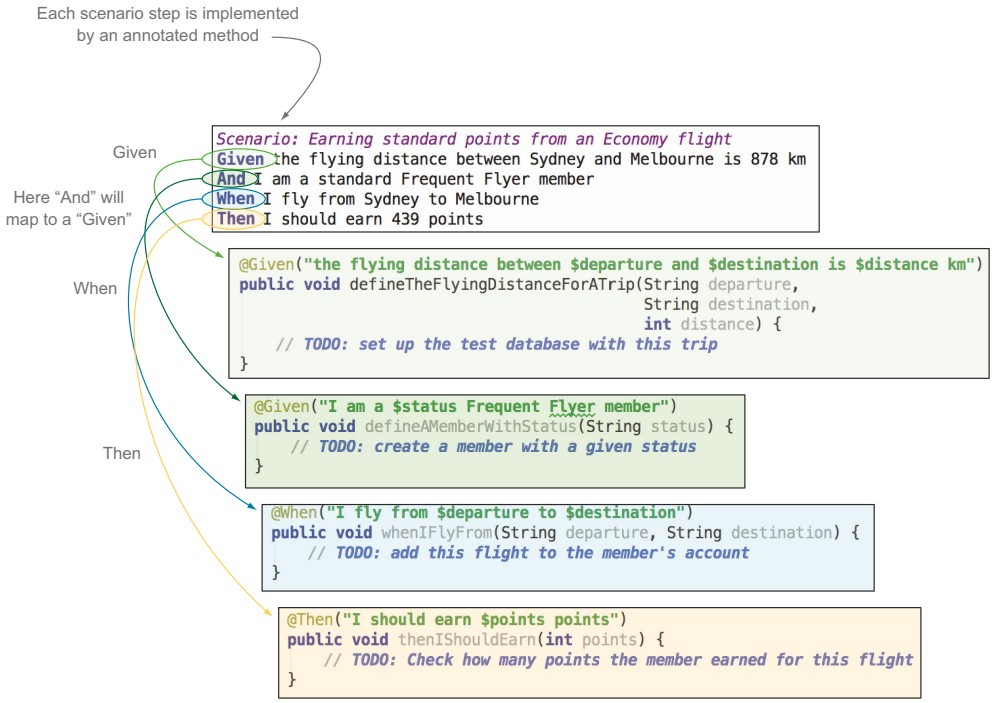


Figure 6.2 Each line (or "step") of a scenario maps to a step definition.

Step definitions can be implemented in a variety of programming languages depending on the test automation library being used. In some cases, the language used to implement the step definitions may even be different than that used to write the application.

For example, a JBehave step definition written in Java might look like this:

```
@Given("the flying distance between $departure and $destination is
        $distance km")
public void defineTheFlyingDistanceForATrip(String departure,
                                            String destination,
                                            int distance) {
    inTheTestDatabase.theDistanceBetween(departure)
                     .and(destination).is(distance);
}
```

What text should trigger this step definition

The step definition method

The code that implements this step

The form varies from one language to another, but the essential information is the same. For example, the equivalent in .NET using SpecFlow might look like this:

```
[Given(@"the flying distance between (.*) and (.*) is (.*) km")]
public void DefineTheFlyingDistanceForATrip(string departure,
                                            string destination,
                                            int distance)
{
  ...
}
```