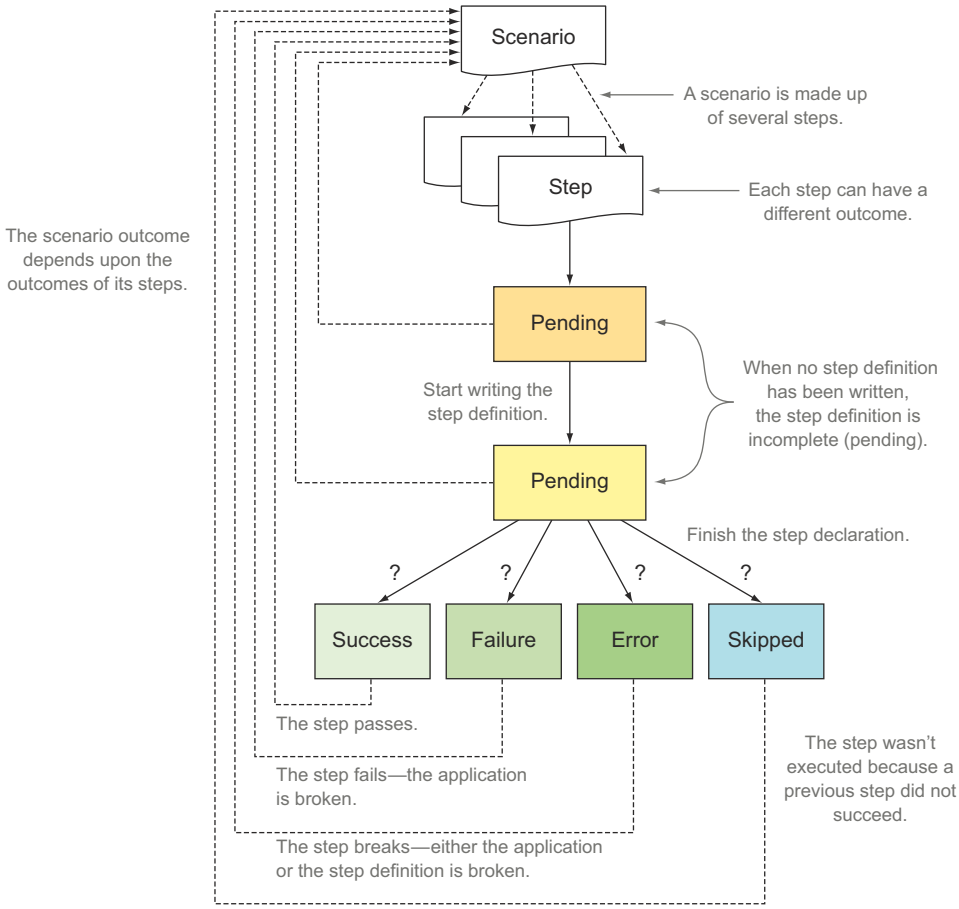


Figure 6.4 Individual steps can have several possible outcomes.

```
When /^Joe transfers (\d+) points to Jill$/ do |pointCount|
    pending
end
```

In Cucumber-JVM you throw a `PendingException`:

```
@Given("I am a (.*) Frequent Flyer member")
public void useAMemberWithAGivenStatus(String status) {
    throw new PendingException();
}
```

Before we look at how you can implement the step definitions in various BDD tools like JBehave, Cucumber, and SpecFlow, we need to discuss another tool that we'll use at various stages: *Thucydides*.