files in the src/test/resources directory of your project (or in subdirectories of this directory).

The `AcceptanceTestSuite` class is a test runner that will execute all of the scenarios in the feature files. This is simply an empty class that extends the `ThucydidesJUnitStories` class:

```
public class AcceptanceTestSuite extends ThucydidesJUnitStories {}
```

Alternatively, some teams prefer to write a separate test runner for each story. This makes it easier to run individual stories from within the IDE and to run the stories in parallel. By default, Thucydides uses the name of the class to know what story to run. For example, the following class will run the earning_points_from_flights.story story:

```
public class EarningPointsFromFlights extends ThucydidesJUnitStory {}
```


Step definition classes can be placed in the same directory (or package, in Java terminology) as the test runner, or in any package underneath this package.

6.4.2 JBehave step definitions

Like many Java-based tools, JBehave uses annotations to bind the text in the feature files to the Java methods that implement them. Suppose you wanted to automate the following step in one of your scenarios:

```
Given I am a Gold Frequent Flyer member
```

You could write a definition for this step like this:

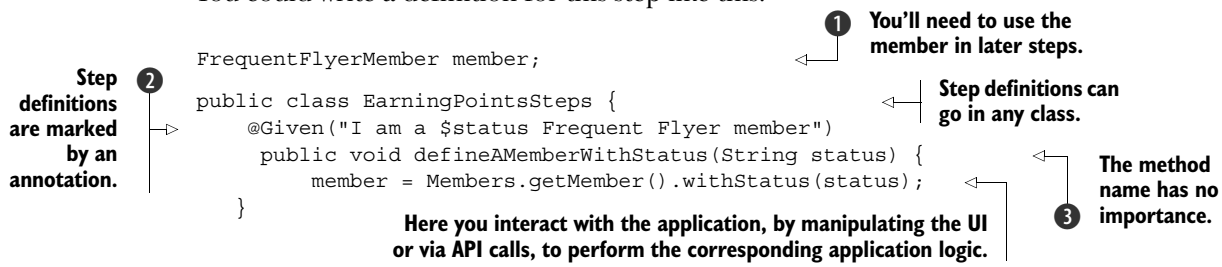


```
FrequentFlyerMember member;

public class EarningPointsSteps {
    @Given("I am a $status Frequent Flyer member")
     public void defineAMemberWithStatus(String status) {
         member = Members.getMember().withStatus(status);
    }
```

JBehave step definitions are just annotated Java[6] methods that live in ordinary Java classes ❶. JBehave uses an `@Given`, `@When`, or `@Then` annotation ❷ to match a step definition method with a line in the feature file. The method name itself ❸ isn't important.

Unlike some of the other tools, `Given`, `When`, and `Then` steps can't be used interchangeably; JBehave will treat them as different steps. For example, "When I fly from Sydney to Melbourne" (an action under test) will run a different step definition than "Given I fly from Sydney to Melbourne" (a precondition).

JBehave lets you pass parameters to your step definitions by putting placeholder variables at the appropriate spots in the annotation text. In the preceding step

[6] Or Groovy or Scala, depending on the language you choose.