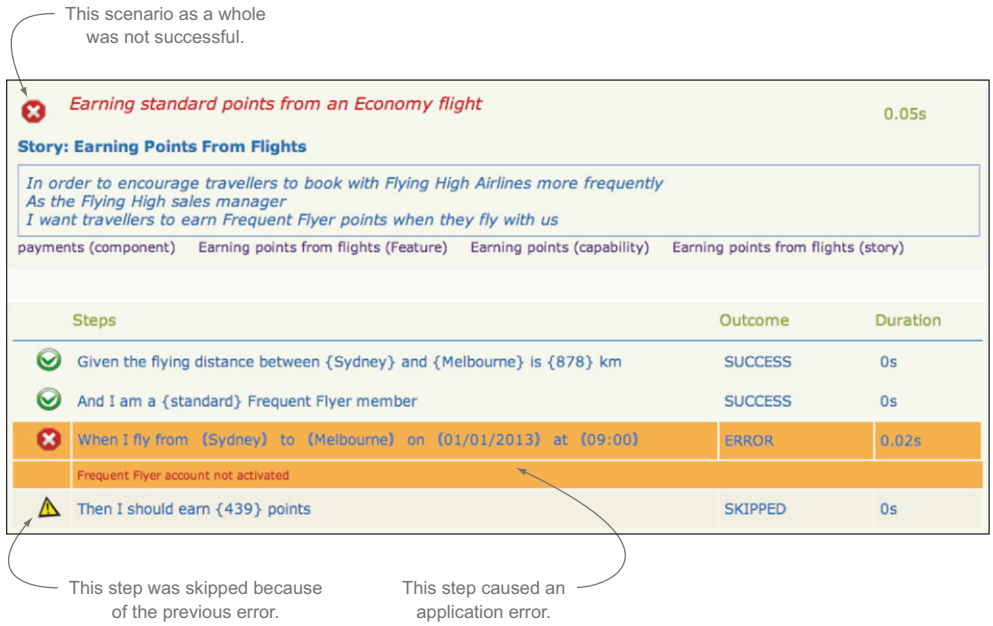


Figure 6.6 Each step in a scenario has its own outcome.

For example, perhaps the "And I am a standard Frequent Flyer member" line failed to create a correctly configured account. When you're writing and maintaining automated acceptance criteria, it's important to be able to distinguish between these two cases.

To make this sort of issue easier to spot and troubleshoot, Thucydides flags any exception that's not an `AssertionError`[8] as an *error* and not as a *failure*.

6.5 Automating scenarios in Java using Cucumber-JVM

The next tool we'll look at is Cucumber (http://cukes.info). Cucumber is a very popular BDD tool from the Ruby world. Using Cucumber in Ruby is well documented on the Cucumber website and in *The Cucumber Book*,[9] so in this section we'll focus on writing scenarios using Cucumber-JVM. Cucumber-JVM is a more recent Java implementation of Cucumber, which allows you to write step definitions in Java and other JVM languages. Teams familiar with the Ruby version of Cucumber may be more comfortable with the Cucumber flavor of "Given ... When ... Then" scenarios than with the JBehave variation. But at the time of writing, Thucydides doesn't yet provide full Cucumber integration.

[8] `AssertionErrors` are caused by logical tests such as the one in the "I should earn $points points" step definition.
[9] Matt Wynne and Aslak Hellesøy, *The Cucumber Book* (Pragmatic Bookshelf, 2012).