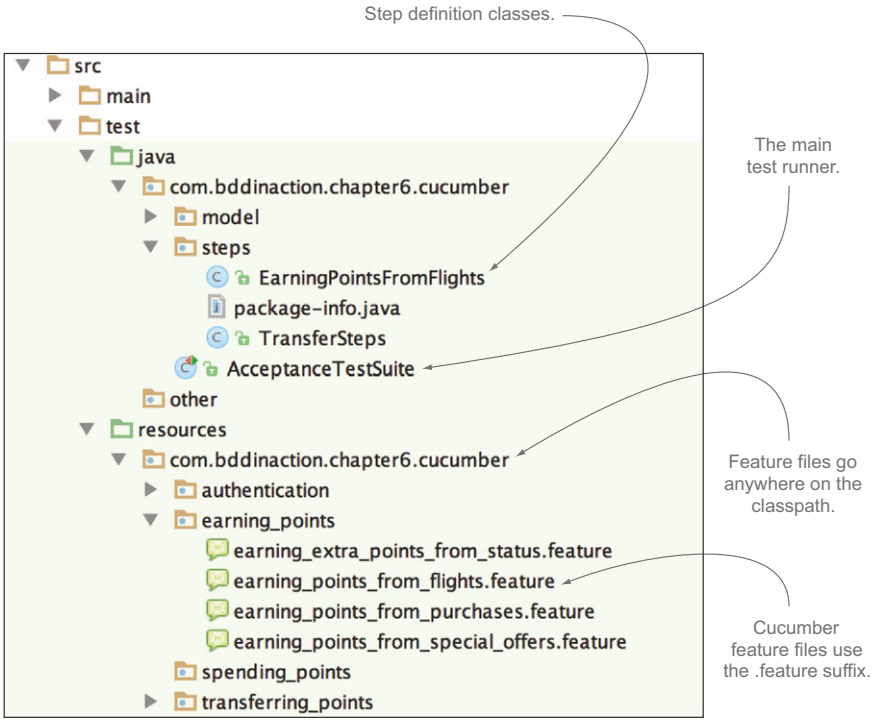


Figure 6.7 The Cucumber-JVM project directory structure

6.5.1 Cucumber-JVM project setup and structure

Setting up Cucumber-JVM in a Maven project is just a matter of adding the Cucumber dependencies to the Maven pom.xml file.[10] Cucumber then runs on top of JUnit, like any other unit test. You can find a full Cucumber-JVM sample project in the sample code for this chapter.

The Cucumber project structure for Java projects is similar to the structure for JBehave/Thucydides and is illustrated in figure 6.7. The main difference relates to the feature files: in Cucumber, they use the `.feature` suffix instead of `.story`, and they go in a package directory structure in src/test/resources matching the one found in src/test/java, rather than directly underneath the src/test/resources directory. In figure 6.7, the Cucumber test classes are in the com.bddinaction.chapter6.cucumber package in src/test/java, so the Cucumber feature files need to be in the com/bddinaction/chapter6/cucumber subdirectory of the src/test/resources directory.

The features are executed by an annotated test runner class like this one:

```
@RunWith(Cucumber.class)
@Cucumber.Options(format = {"html:target/cucumber-html-report"})
public class AcceptanceTestSuite {}
```

[10] You can find an example of the exact dependencies in the sample code for this chapter.