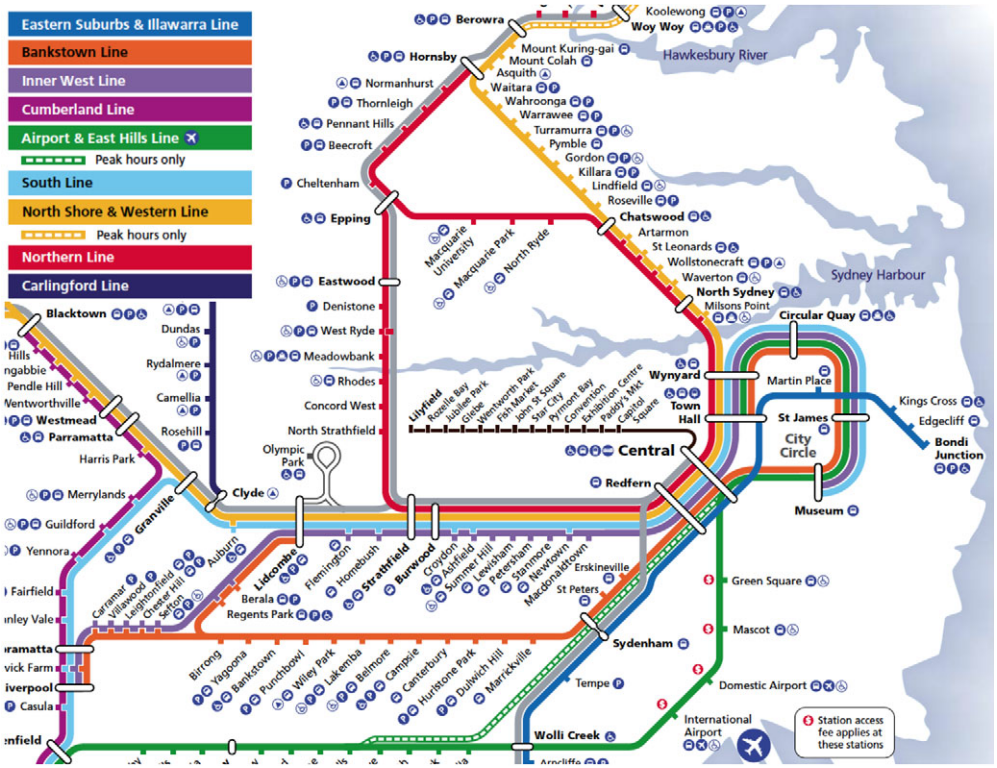


Figure 7.6 Part of the Sydney rail network used in the scenarios for this chapter

In this version, you assume that the stakeholder knows where the Western Line runs, but you spell out the timetable data you're using in the example ❷. In this context, the results ❸ illustrate not only which trains should be returned, but which trains should be excluded from the mix. For more clarity, you also include a short comment to explain the business rule that you're illustrating ❶.

Notice how examples like this can help raise questions about counterexamples and corner cases. What if a train arrives at 8:00? What if there are no more trains until the following day—do you still display the next three?

Embedding tables inside the scenario steps is another popular way to set up test data for a scenario. For example, in the following scenario, you need to tell a traveller how to get to a particular station. You can inject a number of sample timetable entries into the database before using this timetable data to illustrate what scheduled trains you'd like the traveller to see at a given time and station:

```
Scenario: Tell users about the next departure times from a given station
Given the following train timetable entries
| Line        | Destination  | Departs Central     | Platform |
| Northern    | Epping       | 8:02                | 10       |
| Western     | Emu Plains   | 8:04                | 12       |
```

The test data used to prepare the scenario