- The flying-high directory contains the sample website (see sidebar).
- The flying-high-tests directory contains the sample WebDriver code we'll discuss.

Running the sample website

The Frequent Flyer website you'll use is a simple standalone website that will run on any web server. It's a simple, single-page, JavaScript-based web application. You can either deploy it to your own web server or run it as a standalone website. One way to do this is to use Node.js, which is a lightweight JavaScript platform used to build and run JavaScript-based server-side applications. You don't need to know anything about Node.js to run the sample site; just follow the instructions.

First, you'll need to install Node.js, which you can download from the Node.js website (http://nodejs.org/). Once this is done, install the Node.js http-server tool from the command line as follows:

```
npm install -g http-server
```

Now go into the flying-high directory of the chapter 8 sample code, and start up the website with the following command:

```
http-server app
```

To view the running application, open up a web browser and go to http://localhost:8080 (unless you already have an application running on port 8080, in which case it will run on port 8081). You should see a page similar to the one in figure 8.5.

Suppose you're testing the sign-in feature of your Frequent Flyer website. Registered members need to enter their email address and password to access their account details. The login screen looks something like the one in figure 8.5.

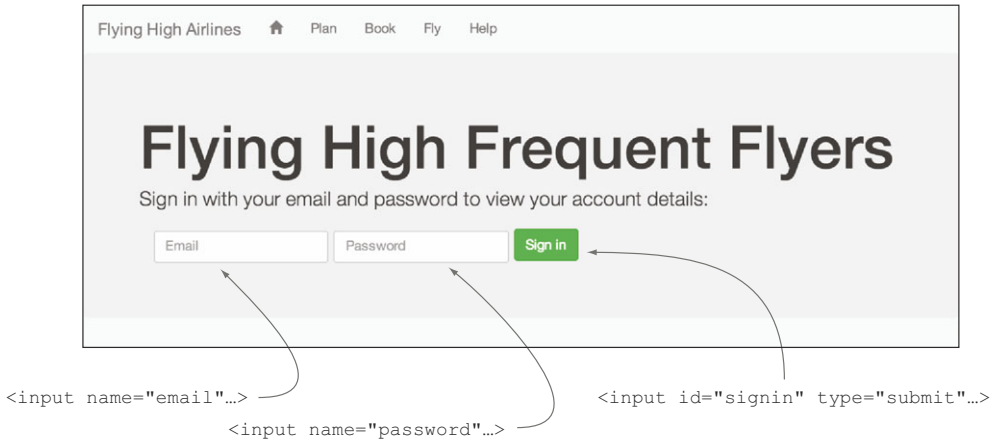


Figure 8.5 Flying High Frequent Flyer members identify themselves using their email address and a password.