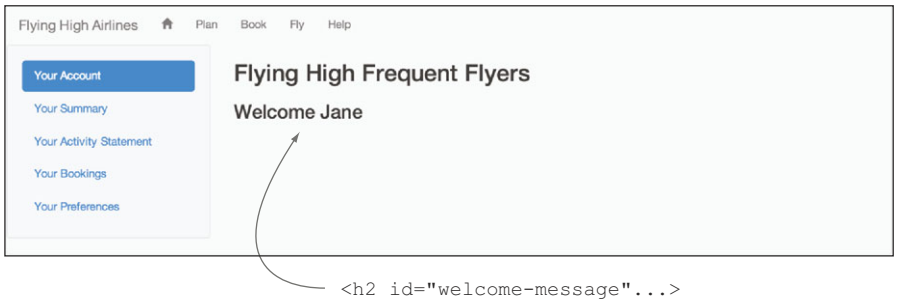


Figure 8.6 Authenticated members are welcomed with a friendly message.

Once a member has entered a matching email and password, they'll be welcomed to the member's area with a friendly message (see figure 8.6).

A scenario describing this requirement might look like this:

```
Scenario: Successful authentication
Given Jane is a registered Frequent Flyer
When Jane authenticates with a valid email address and password
Then Jane should be given access to her account
```

What does Jane need to do to authenticate?

Jane is a defined persona known to team members.

What is the expected business outcome?

Using the WebDriver Java API, your test might contain the following code:

```
WebDriver driver = new FirefoxDriver();
driver.get("http://localhost:8080/#/welcome");
driver.findElement(By.name("email")).sendKeys("jane.smith@acme.com");
driver.findElement(By.name("password")).sendKeys("s3cr3t");
driver.findElement(By.id("signin")).click();
WebElement welcomeMsg = driver.findElement(By.id("welcome-message"));
assertThat(welcomeMsg.getText()).isEqualTo("Welcome Jane");
```

❶ **Create a new WebDriver instance using Firefox.**

Open Firefox using this URL.

Enter the member's email and password.

Click on the Sign In button.

Check the current page title.

Check the current page welcome message.

The first thing you do is create a new WebDriver `driver` instance ❶. This `driver` instance, which implements the `WebDriver` interface, is the starting point for all of your interactions with the application.

The `WebDriver` interface has a number of implementations, one for each supported browser, and you need to specify which implementation you want to use. Here, you're creating a new instance of the `FirefoxDriver` class, which you'll use to run the tests in a Firefox browser.[1] You can run the tests in a different browser by using a different implementation (see table 8.1).

[1] Of course, you'll need to have Firefox installed for this to work.