For example, suppose there are several Book links at different places on the page, and you need to click on the Book link in the main menu. You could do this by first finding the main menu using its ID, and then finding the menu entry within the main menu's web element using the `linkText` selector:

```
driver.findElement(By.id("main-navbar"))
      .findElement(By.linkText("Book"))
      .click();
```

**Narrow down the search for elements to the main navbar.**

**Look for a link within the navbar.**

**Click on the link.**

This approach is clear and intuitive and tends to be less error-prone than using complex XPath expressions or CSS selectors.

### 8.2.3 Interacting with web elements

Interacting with web elements in WebDriver is usually fairly intuitive, and it involves a relatively small number of methods. You can use the `click()` method on any web element (not just buttons and links) to simulate a mouse click. The `sendKeys()` method can be used to simulate user input. And the `getAttributeValue()` and `getText()` methods let you retrieve attribute values and the text contents of a web element.

The Frequent Flyer booking page illustrated in figure 8.10 has many fields that can illustrate these ideas.

#### TEXT INPUT FIELDS

To enter a value into a text field, you can use the `sendKeys()` method, as shown here:

```
driver.findElement(By.id("from")).sendKeys("Sydney");
```

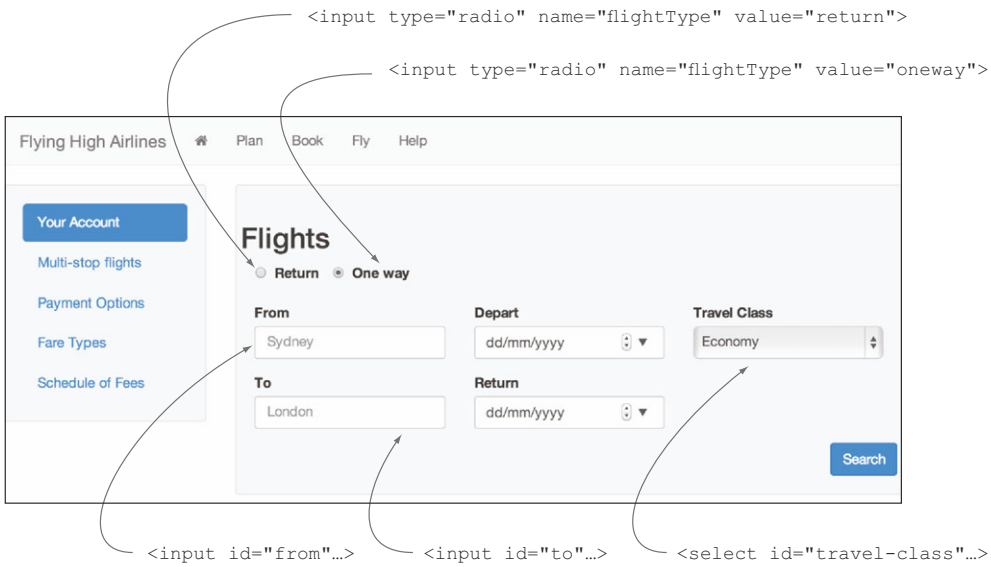



**Figure 8.10 The Frequent Flyer booking page**