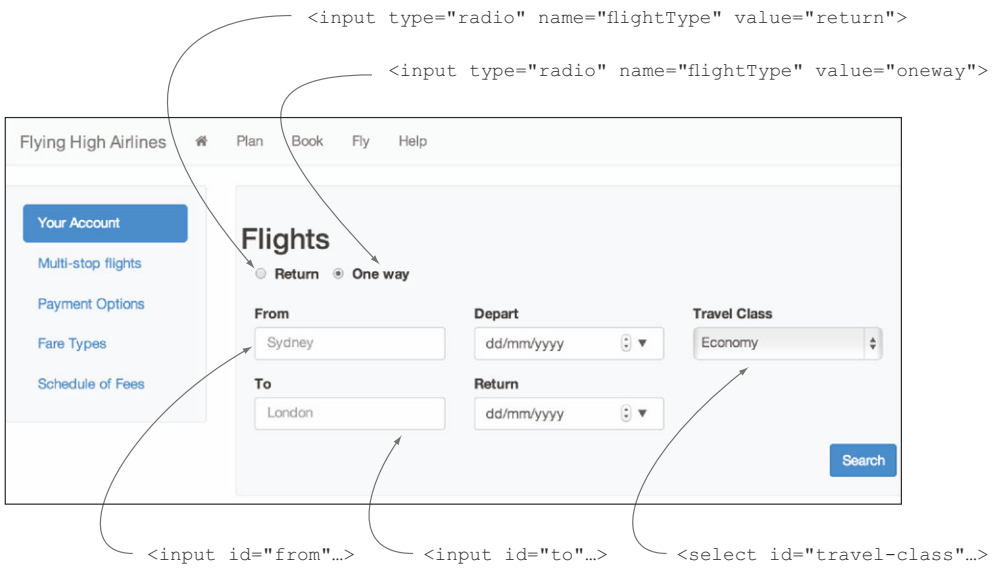


Figure 8.13 The flight booking page has a number of fields that could be read and written to via a page object class.

For example, the `from` and `to` fields could be exposed as simple `String` values:

```
WebElement from;                                          <-- The from input field.

public BookingPage setFrom(String fromCity) {             | Set the from value
    from.sendKeys(fromCity);                              | using a String.
    return this;                                          <-- Return the page object to make
}                                                             it easier to chain set() methods.

public String getFrom() {                                 | Retrieve the value
    return from.getAttribute("value");                    | as a String.
}
```

In a similar manner, the `depart` and `return` fields might be presented as dates:

```
WebElement depart;                                        <-- Declare the
                                                              departure date field.
public BookingPage setDepart(DateTime departDate) {
    depart.sendKeys(departDate.toString("dd/MM/yyyy"));   <-- Set the departure date
    return this;                                              field by formatting the
}                                                             date value.

public DateTime getDepart() {
    return DateTime.parse(depart.getAttribute("value"),
                          DateTimeFormat.forPattern("dd/MM/yyyy"));
}
```

Return a DateTime value by parsing the contents of the date field.

Lists of values should be returned as lists of primitive types (strings, dates, numbers, and so on) or as lists of domain objects. You saw an example of this with the type-ahead values: