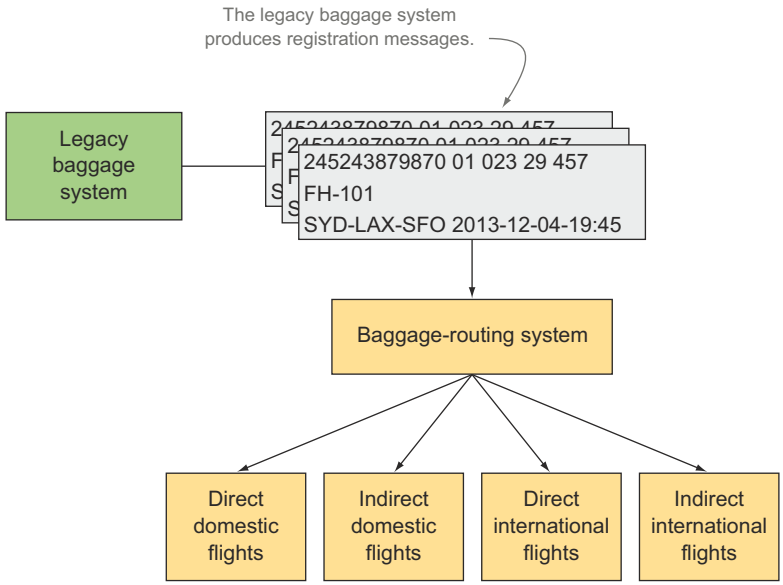


Figure 9.7 The Flying High baggage-routing system takes legacy messages and routes them to different subsystems.

is booked on a domestic or international flight and whether the flight is a direct one or involves transfers (see figure 9.7).

One way you could do this is to embed the actual content of the message in the feature file. One such scenario, implemented using Cucumber in Java, might look like this:

```
Scenario: Registered baggage should be queued according to its itinerary type

Given a baggage registration message:
"""
245243879870 01 023 29 457
FH-101
SYD-LAX-SFO 2013-12-04-19:457
"""
When the baggage registration is processed
Then the registration details should be:
| flight | depart | destination | via | workflow                |
| FH-101 | SYD    | SFO         | LAX | international-transfer |
```

1 **The message header**

2 **The flight number**

3 **Itinerary details**

4 **Extract these details from registration message**

Alternatively, you could use a set of named, well-defined message files. This approach is similar to the personas we looked at in section 7.2.5; it allows you to make the tests more concise by hiding the message details behind a well-known identifier.

```
Scenario Outline: Baggage is processed according to its itinerary type
Given a baggage registration message <message>
When the baggage registrations are processed
Then the bags should be placed in the <workflow> workflow
```