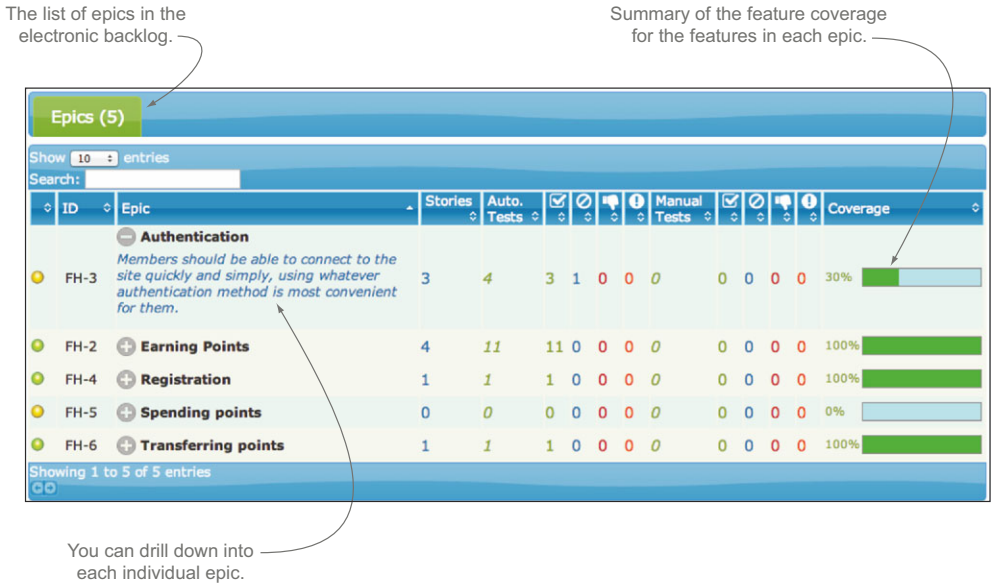


Figure 11.8 One useful way to organize living documentation is in terms of high-level requirements, such as epics or capabilities.

Sometimes the structure that comes from this sort of hierarchical organization is a little too rigid. As you'll see in the next section, tags can offer a more flexible option.

11.4.2 Organizing living documentation using tags

There are times when it's useful to group features in a more free-form manner. For example, you might want to examine all of the features related to particular nonfunctional requirements, such as security or performance, or all of the features that need to integrate with a particular external system.

Tags are an easy way to identify nonfunctional requirements like this. For example, the following Thucydides/JBehave scenario has been tagged with the "security" nonfunctional requirement:

```
Registering for a Frequent Flyer account online

Meta:
@issue FH-13
@tag non-functional:security

Scenario: Registering online for a new Frequent Flyer account
Given Jane is not a Frequent Flyer member
When Jane registers for a new account
Then Jane should be sent a confirmation email with her account number
And Jane should receive 500 bonus points
```

Tag these scenarios with the "security" nonfunctional requirement.

These features won't necessarily be grouped in a single capability or epic; in fact, they're typically scattered across the whole application. But it's still often useful to report on all of the features that are impacted by this nonfunctional requirement.