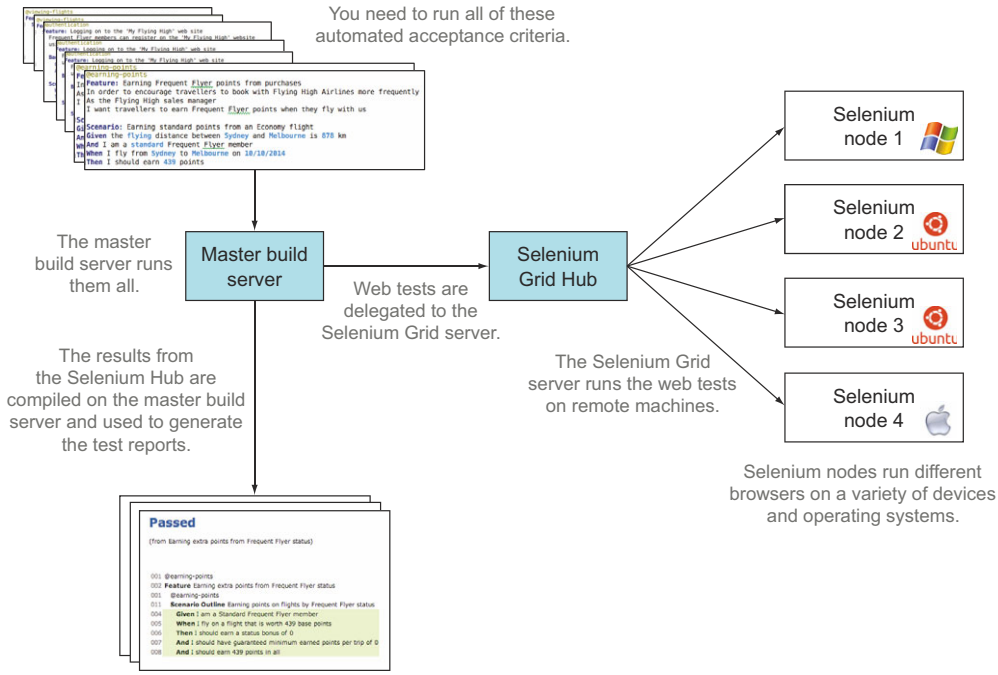


Figure 12.12 Selenium Grid lets you run WebDriver-based tests on a number of remote machines.

The Selenium Hub binary comes as part of the Selenium Server JAR file that you download from the Selenium site (http://docs.seleniumhq.org/download/). To start it, you execute the JAR file with the `-role hub` option, as shown here:

```
java -jar selenium-server-standalone-2.39.0.jar -port 4444 -role hub
```

This will run the Selenium Hub on port 4444.

Before you can use this hub for any tests, you need to register some Selenium node machines to run the tests. From the machine you want to run the actual tests on, you start up the Selenium Server with the `-role node` option, typically along with other options related to what browsers are installed on the node and the maximum number of each browser to open simultaneously on the node. For example, if the Selenium Hub is running on selenium.acme.org, you could set up a Linux node running up to four instances of Firefox and Chrome like this:

```
java -jar selenium-server-standalone-2.39.0.jar
-role node
-hub http://selenium.acme.org:4444/grid/register
-browser browserName=firefox,maxInstances=4
-browser browserName=chrome,maxInstances=4
```

Run the same JAR file as the Hub.

This time you're running a node.

Specify the URL of the hub machine.

This server can run up to four instances of Firefox.

It can also run up to four instances of Chrome.