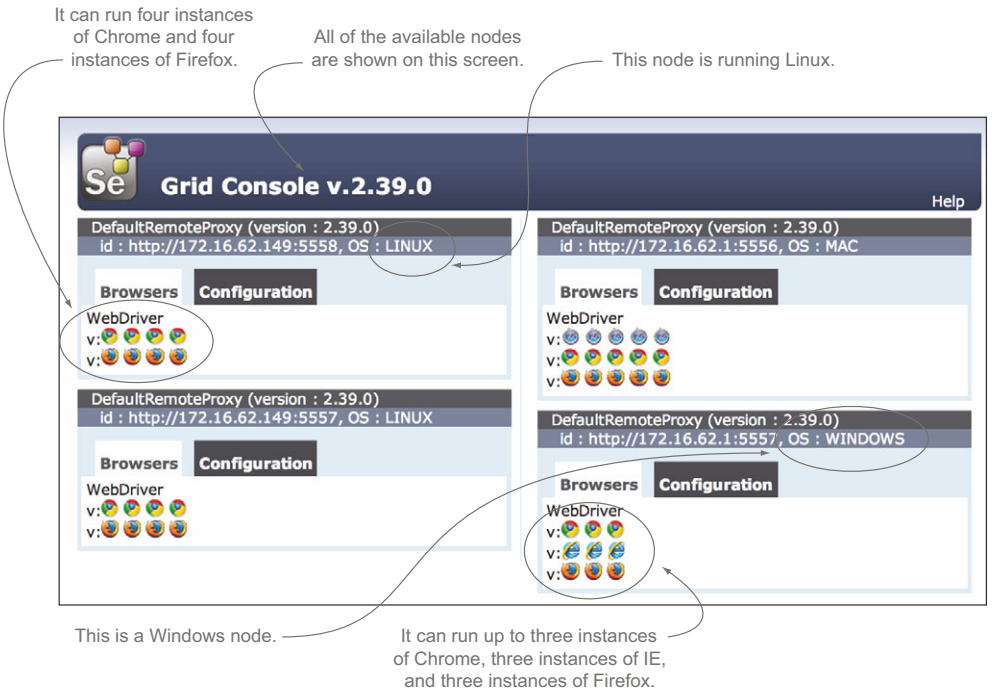


Figure 12.13 The Selenium Grid console page shows all the available Selenium nodes, what OS they're running, and which browser instances they're hosting.

There are many other options available, which are documented on the Selenium Grid website. For more complex configurations, you can also place the configuration options in a JSON file.

Once you've registered a few hubs, you can monitor them on the Selenium Hub console page, as illustrated in figure 12.13.

When the nodes are running, you can start dispatching your tests to the Selenium Hub instead of running them locally. If you're dealing with native Selenium, you'll need to use a `RemoteWebDriver` to connect to the Selenium Hub. In Java, for example, you might do something like this:

Creates a new RemoteWebDriver instance and proceeds as normal

```
DesiredCapabilities capabilities = new DesiredCapabilities();
capabilities.setBrowserName("chrome");
capabilities.setPlatform(Platform.LINUX);
URL hubUrl = new URL("http://my.selenium.hub:4444/wd/hub");
WebDriver driver = new RemoteWebDriver(hubUrl, capabilities);
```

❶ **Determines which Selenium node should be used**

The URL of the Selenium Hub machine

The `DesiredCapabilites` object ❶ is used to provide a description of the environment you'd like to run this test in. These parameters are used to send the web test to the most appropriate Selenium node machine. Then you create a `RemoteWebDriver`