instance using these preferences and the URL of the Selenium Hub, and use this WebDriver instance to run your tests.

If you're using Thucydides, you just need to provide the `webdriver.remote.url` system property, and Thucydides will run all of the scenarios on the Selenium Hub automatically.

If you provide undemanding desired driver capabilities (for example, you might just be interested in running your tests on Firefox), then Selenium Grid will transparently dispatch your web tests to as many compatible Selenium node machines as possible. This, combined with the parallel testing strategies we saw earlier, is a simple and effective way to scale your tests.

If you have more involved web-testing requirements (for example, you may need to test on a number of specific browsers), then Selenium Grid combined with the Jenkins multi-configuration build job (see figure 12.10) that you saw earlier is a great fit. But this time you'd use two User-Defined Axis fields: one for the test sets you want to execute, and another for the browsers you want to use. The resulting build job will run each test under every browser (see figure 12.14).

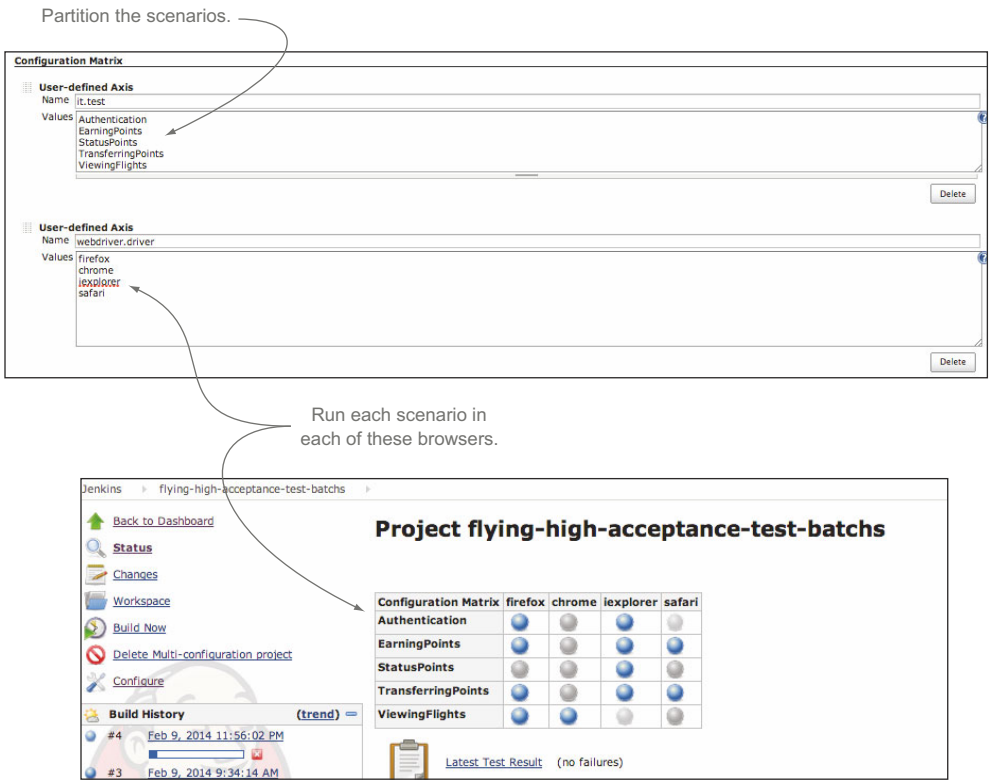


Figure 12.14 Multi-configuration build jobs work well with Selenium Grid.