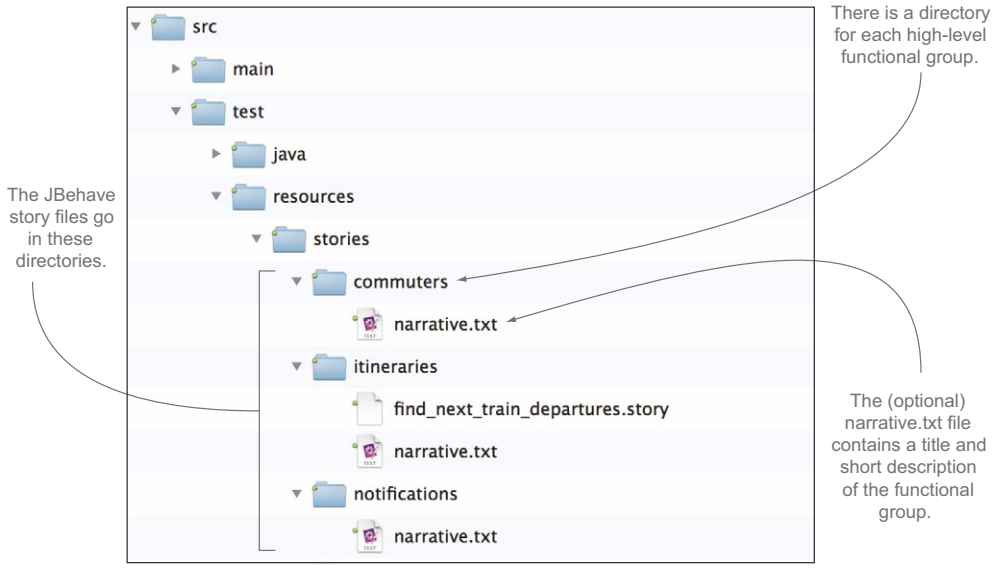


Figure 2.3 The JBehave story files are organized into directories.

For documentation purposes, you can also add a text file called narrative.txt[11] in each of these directories. The text file will contain the name of the functional group and a short description of what it covers. For example, the narrative.txt file for the itineraries directory might look like the following listing.

Listing 2.2 The narrative.txt file describes high-level functionality

```
Itineraries and timetables
Providing real-time information on timetables and itineraries.
```

A one-line title

A short, free-form description of this high-level functionality

You now have an executable specification. Though there's no code behind this JBehave scenario, you can still execute it. If you want to try this out, go into the train-timetables directory and run the following command:

```
$ mvn verify
```

This generates a set of reports in the target/site/thucydides directory.[12] If you open the index.html file in this directory and click on the only test in the Test table at the bottom of the screen, you should see something like figure 2.4.

[11] If provided, the narrative.txt file is also used by Thucydides to generate the living documentation you'll see further on.

[12] If you're not a regular Maven user, Maven will first download the libraries it needs to work with—this may take some time, but you'll only need to do it once.