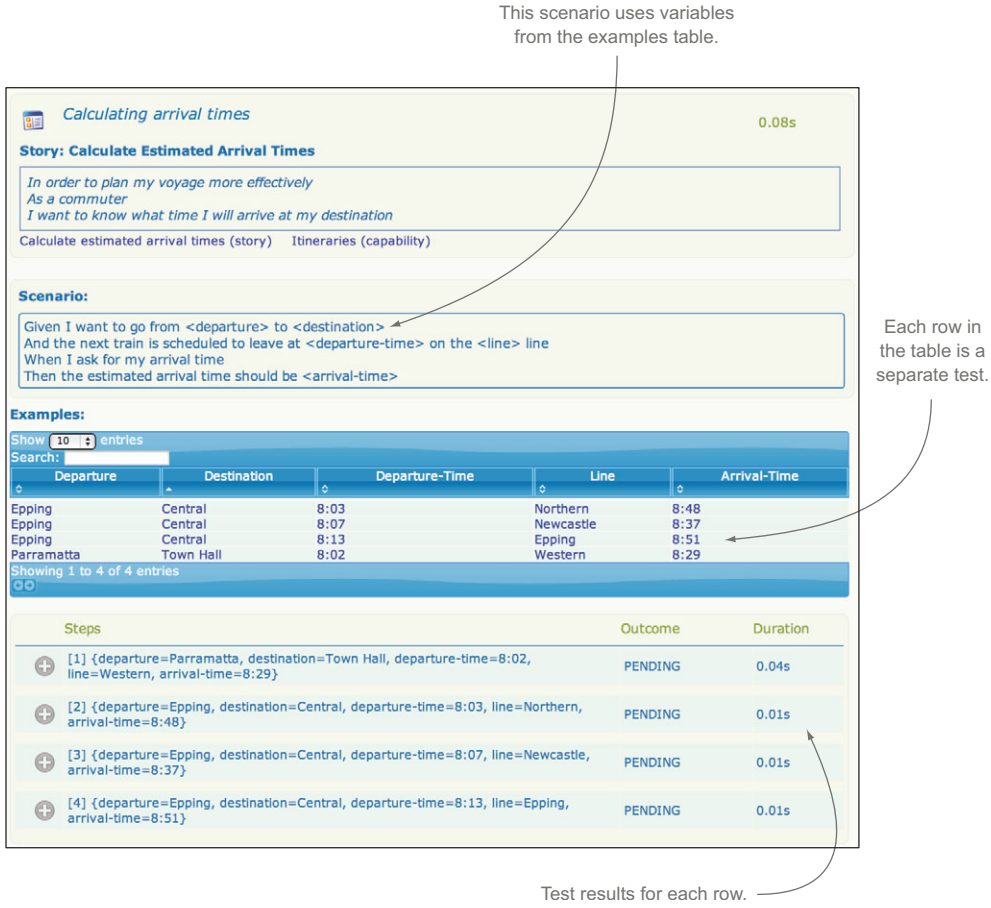


Figure 2.6 Living documentation for a table-based scenario

The main novelty here is the use of a table in text form to represent the test data. The table headings ❶ identify the values in the test data. Each row in the table ❷ represents a separate set of test data to be used with this scenario.

You can put this story into a file called calculate_estimated_arrival_times.story, next to the previous story file. This will add it to the set of stories that JBehave runs, so it will become part of your living documentation when you run the tests (see figure 2.6).

The language used in both of these scenarios is very close to that provided by the user. When the scenarios appear in the test reports, the use of this familiar language makes it easier for testers, end users, and other non-developers to understand what features are being tested and how they're being tested.

2.4.4 Automated tests: implementing the acceptance criteria

Now that you've defined and automated some acceptance criteria, the real work begins. Naturally the logic required to verify acceptance criteria doesn't write itself: you'll need to add some code to make the tests actually do their jobs.