
❷ Test data computed over a grid between -5 and 5.

Another thing we need to do is to modify how GP models are implemented so that they can be used with BayesOpt policies in BoTorch. Implementing the GP makes up the first step of our BayesOpt loop/

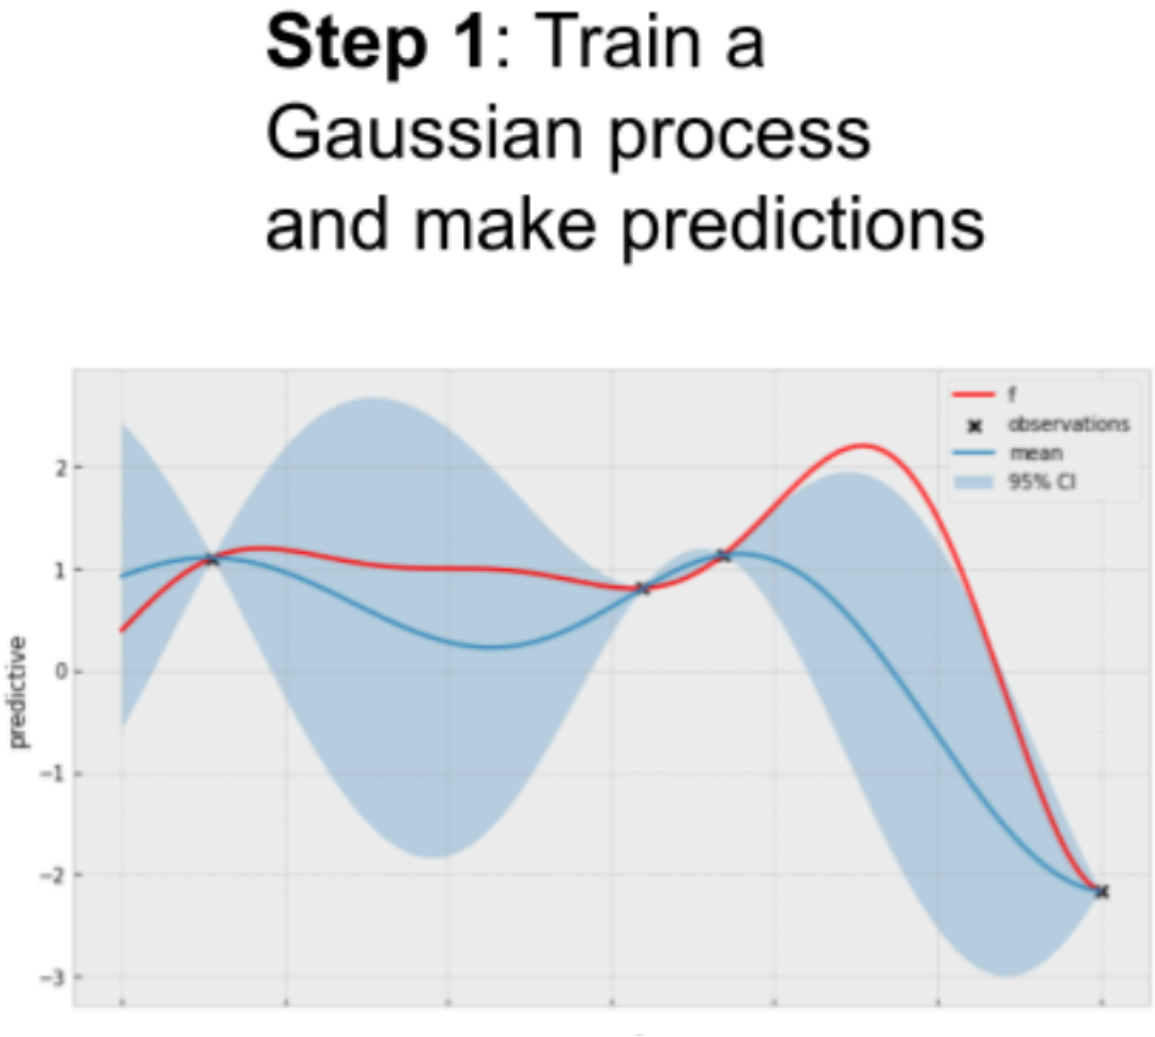

Since BoTorch is built right on top of GPyTorch, only minimal modifications are required. Specifically, we use the following GP implementation, where we inherit from the `botorch.models.gpytorch.GPyTorchModel` class, in addition to our usual `gpytorch.models.ExactGP` class. Further, we are declaring the class-specific attribute called `num_outputs` and set it to 1. These are the minimal modifications we need to make in order to use our GPyTorch model with BoTorch, which implements the BayesOpt policies that we will be using.

©Manning Publications Co. To comment go to liveBook
https://livebook.manning.com/#!/book/bayesian-optimization-in-action/discussion

Licensed to ashwin sampath <ashwin.manning@gmail.com>