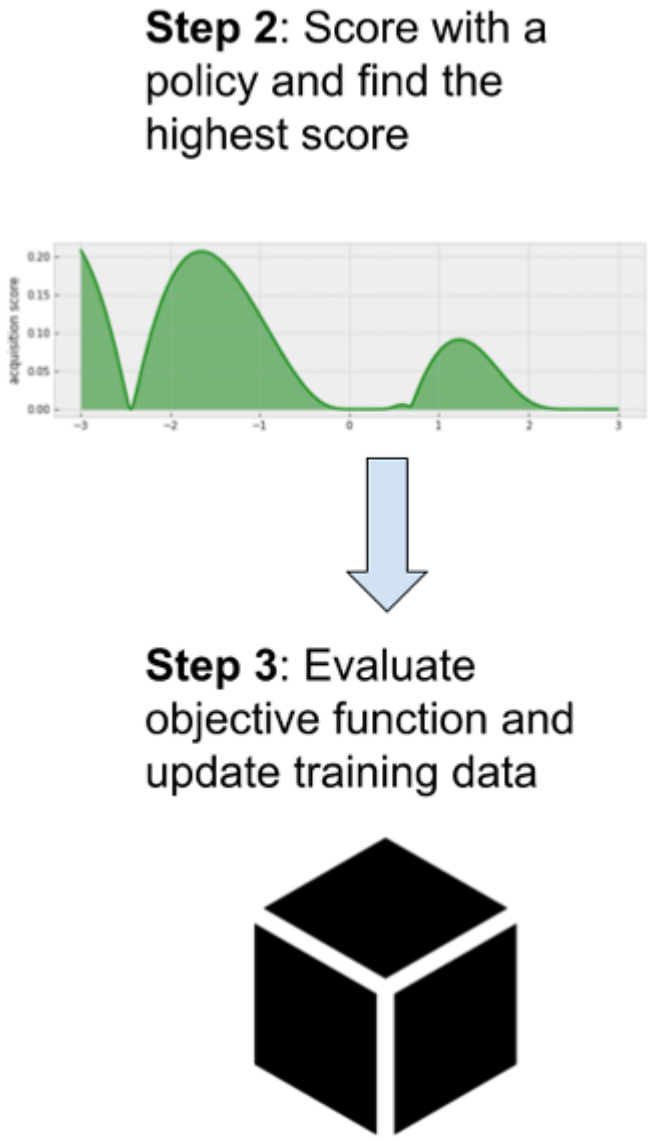


For the first task of identifying the point giving the highest acquisition score, while it's possible in our Forrester example to scan over a one-dimensional search space, an exhaustive search becomes more and more expensive as the number of dimensions of the objective function increases.

IMPORTANT **Using a helper function to maximize the acquisition score**

We can use BoTorch's helper function `botorch.optim.optimize.optimize_acqf()`, which finds the point that maximizes the score of any BayesOpt policy. The helper function uses L-BFGS, a quasi-Newton optimization method that generally works better than gradient descent.

We do this as follows, where:

©Manning Publications Co. To comment go to liveBook
https://livebook.manning.com/#!/book/bayesian-optimization-in-action/discussion

Licensed to ashwin sampath <ashwin.manning@gmail.com>