```
plt.figure(figsize=(8, 6))

show_agg_progress([path to EI data], "EI")
show_agg_progress([path to PoI data], "PoI")
show_agg_progress([path to modified PoI data], "PoI" + r"$(\epsilon = 0.1)$")

plt.xlabel("# queries")
plt.ylabel("accuracy")

plt.legend()

plt.show()
```

This generates Figure A.9, which shows the optimization performance of PoI, the modified version of PoI, and EI.

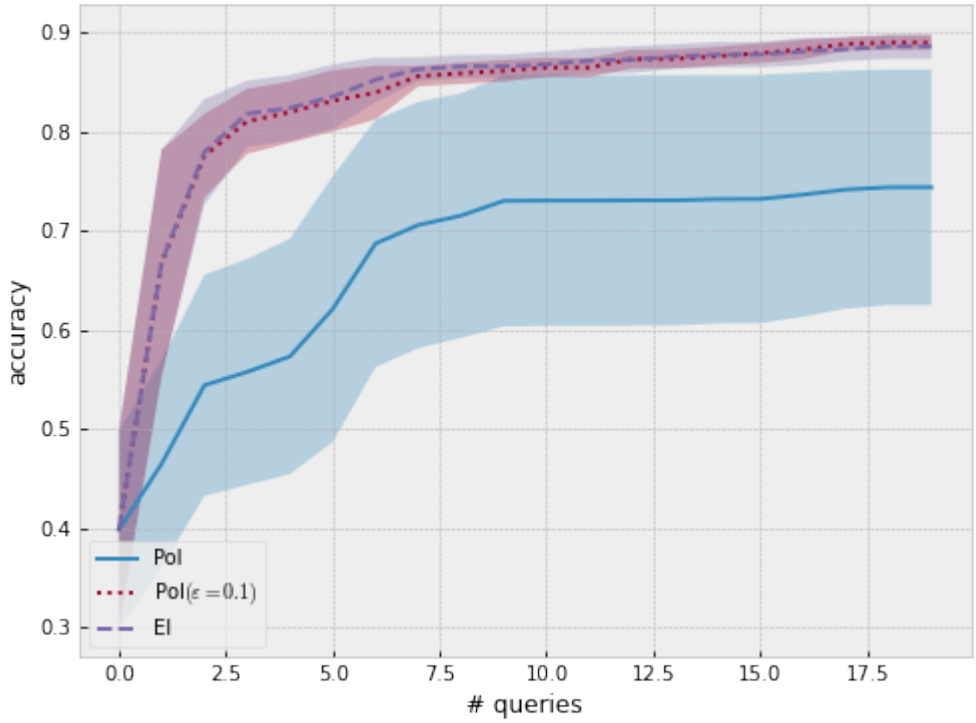


Figure A.9 Optimization progress of various policies, aggregated across 10 repeated experiments.

We see that Figure A.9 gives us more insight than inspecting the policies in a single run. Here, not only does PoI perform worse than the other two policies, but its performance is also less robust, as seen from the large error bars. The modified PoI and EI perform comparably, and it's hard to tell if one is better than the other, as their error bars overlap.

A.5 Chapter 5: Exploring the search space with bandit-style policies

There are two exercises in this chapter:

1. The first explores a potential method to set the tradeoff parameter for the Upper Confidence Bound policy that considers how far along we are in optimization.
2. The second applies the two policies we have learned in this chapter to the hyperparameter tuning problem seen in previous chapters.

©Manning Publications Co. To comment go to liveBook
https://livebook.manning.com/#!/book/bayesian-optimization-in-action/discussion

Licensed to ashwin sampath <ashwin.manning@gmail.com>