
```
      onChange={handleSearch}
      placeholder="Search..."
      spellCheck="false"
    />
  );
};
```

To observe the effect of debouncing, execute the example with the command: `VITE_NAME=VITE_NAME=DebounceExample npm run dev`. Console messages will be logged when typing pauses, demonstrating how debouncing effectively optimizes performance by limiting the rate at which functions are invoked. The observed outcome will be comparable to that depicted in figure 4.7.

Figure 4.7 Console output showing debouncing effect for input "abcdefghij"

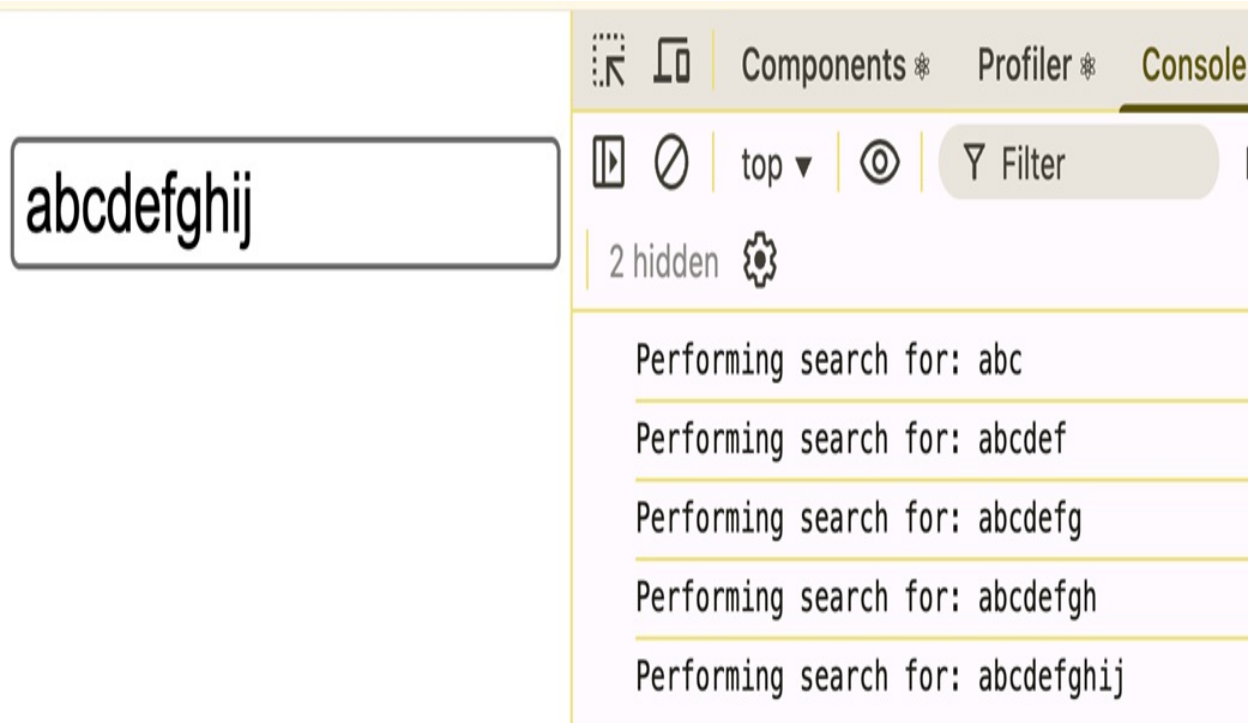

The console output illustrates the debouncing effect:

- After typing "abc" and pausing, "abc" is displayed.
- After typing "def" and pausing, "abcdef" is displayed.
- After typing "g" and pausing, "abcdefg" is displayed.
- After typing "h" and pausing, "abcdefgh" is displayed.