profile by adding the following environment variable to the shell configuration file (`.zshrc` or `.bashrc`):

```
export WEB3FORMS_ACCESS_KEY="<your_access_key>"
```


But Jane needs to create a `.env` file in the project root directory with the following content:

```
VITE_ACCESS_KEY=$WEB3FORMS_ACCESS_KEY
```

This setup ensures that the access key is securely managed as an environment variable and kept out of the source code, making it accessible during development.

After configuring the environment, start the development server to test the form functionality by running the command: `VITE_NAME=FormSimple npm run dev`. The output of this implementation is shown in Figure 2.11.

Figure 2.11 User interface after a successful form submission.

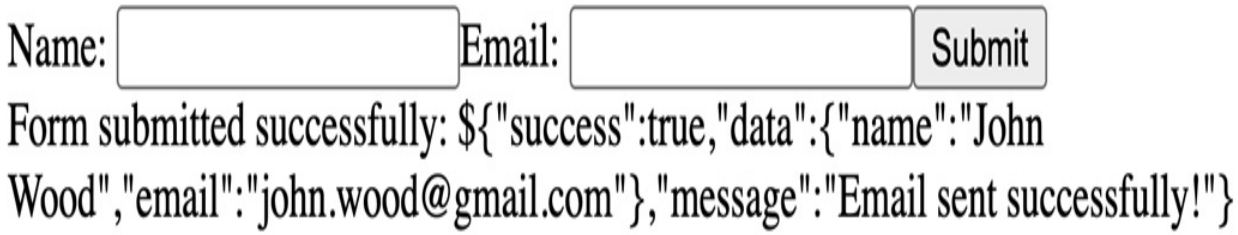

The interview process is iterative, allowing for continuous improvement of the solution. If time permits, consider enhancing the form component with additional features, such as:

- Customized validation logic
- Improved user feedback mechanisms
- Basic styling for better visual appeal
- Modularized code for maintainability and scalability

Listing 2.9, defined in `components/form/FormAdvanced.tsx`, is the enhanced version of the code that introduces several improvements: