Figure 4.6. The object structure of a commit in a typical DVCS

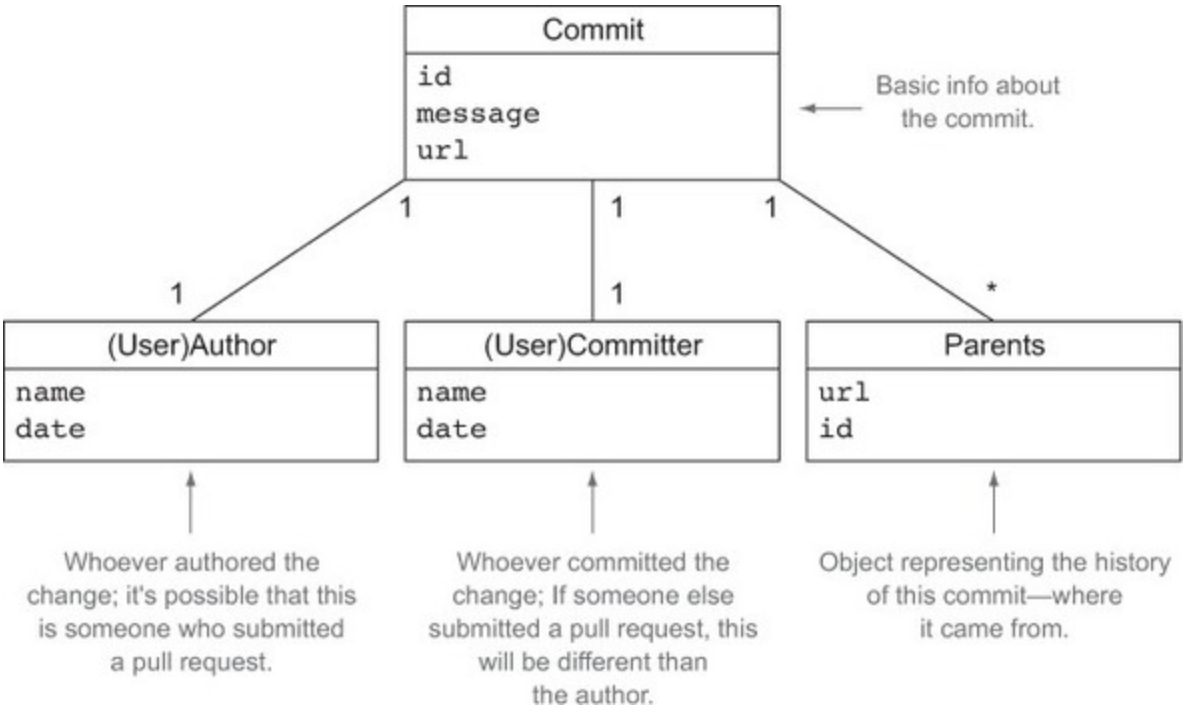


Figure 4.6 contains a message, an ID that's usually in the form of an SHA (secure hash algorithm), parent URLs that link to the previous history of the commit, and the name of the person who created the code that was committed. Keep in mind that who wrote the code can be someone different than who commits it to the repo. If you're following good gitflow or feature-branch workflows, you'll see this often; a developer will submit a pull request and typically the last reviewer or the owner repo will accept and usually commit the change.

Speaking of pull requests, the typical structure for them is shown in figure 4.7.

Figure 4.7. The data structures you can get from a pull request in DVCS