
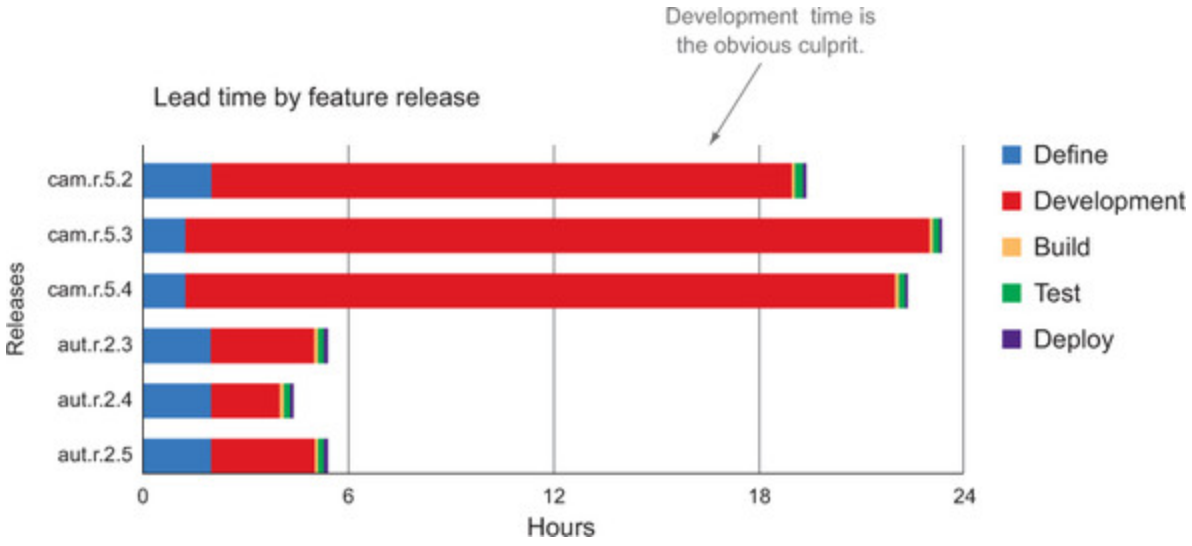


They decided to refactor this part of the code base, abstracting the inputs and outputs with interfaces and then writing new code that handled requests, as shown in figure 8.20.

Figure 8.20. The surround and starve refactoring pattern

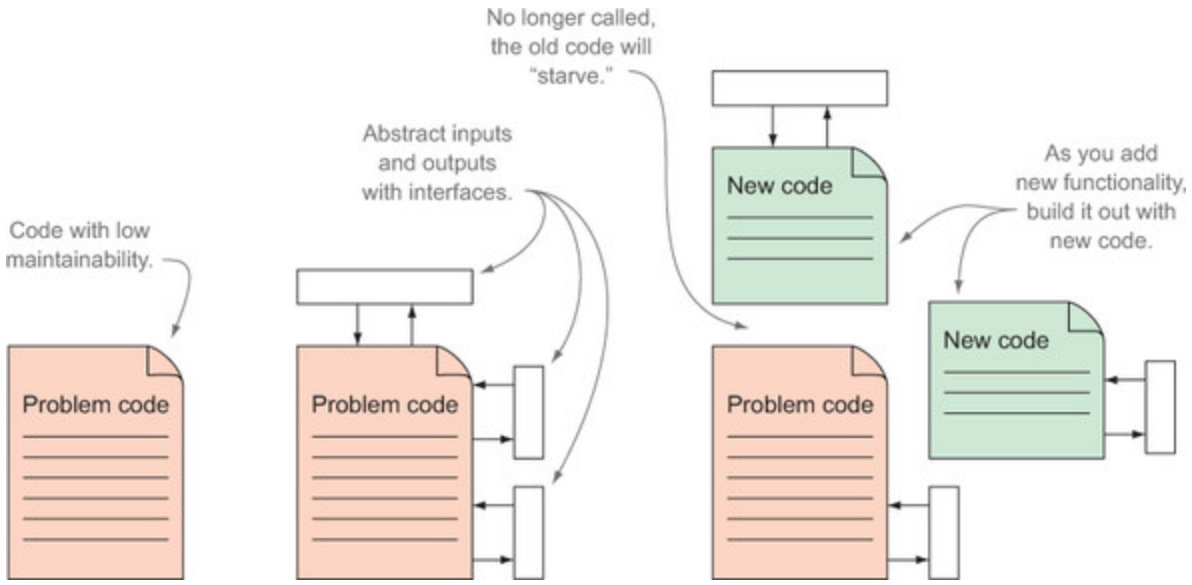

This allowed them to write new code with good test coverage in smaller modules and eventually stop calling the problem code in favor of the new code.

Refactoring patterns