
Before you start building the system, let's take a more in-depth look at its design and specification.

A.1. Setting up your system

Now that we've looked at the high-level design, let's set up the system. Because the system depends on open source components instead of finding, downloading, and installing every component, I've boiled all the pieces into a Puppet script, which you'll use to install everything you need in a VM using Vagrant. Using Puppet you can set up this system anywhere you can create a VM. For the purposes of this book I'll focus on getting you up and running on your localhost.

The interaction of Vagrant, Puppet, and VirtualBox on a local development machine is shown in figure A.3.

Figure A.3. How Vagrant, Puppet, and VirtualBox interact with your development environment

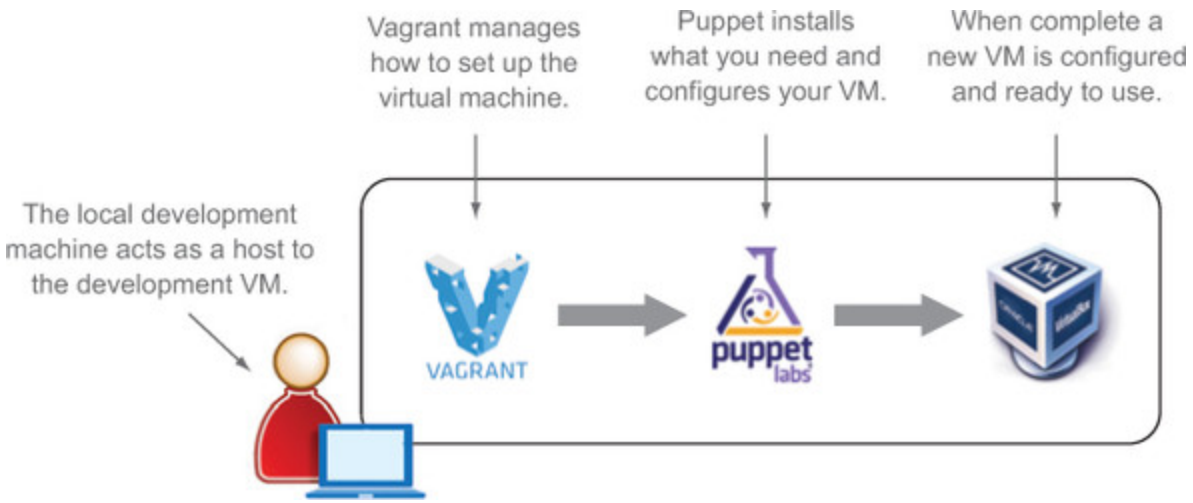

First, get the latest version of Vagrant from www.vagrantup.com/downloads.html. If you're using Windows, you'll also need to install `Cygwin` with the `openssh` package so you can connect to your Vagrant machine when it boots up.