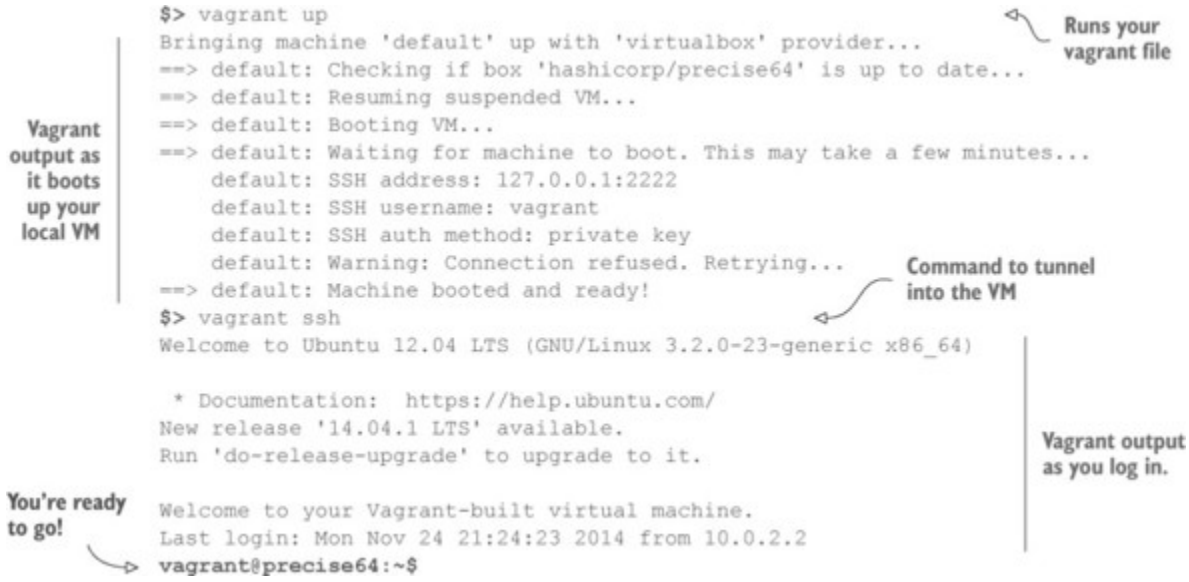


Now you have a local VM with all the components you need installed on it. In the Vagrant file I've set up ports to share with your localhost, so you can check on EC and Kibana from your web browser at the following URLs:

- EC: http://localhost:9200
- Kibana: http://localhost:5601

If those URLs come up, then you've successfully gotten your local environment up and running.

A few more useful Vagrant commands

Vagrant makes it very convenient to develop in a sandbox. It's so easy to set up a new system that often during development you may want to tear the system down and start again. To completely wipe away your environment use the `vagrant destroy` command, you can always create a new one using `vagrant up again`.

One drawback to using a VM for development is that it will use up a lot of your system's resources, making other programs slow while your VM is booted and running. If you want to halt development and go back to other work, you can pause your Vagrant box using the v`agrant suspend` command. That will effectively pause the state of your VM and return the