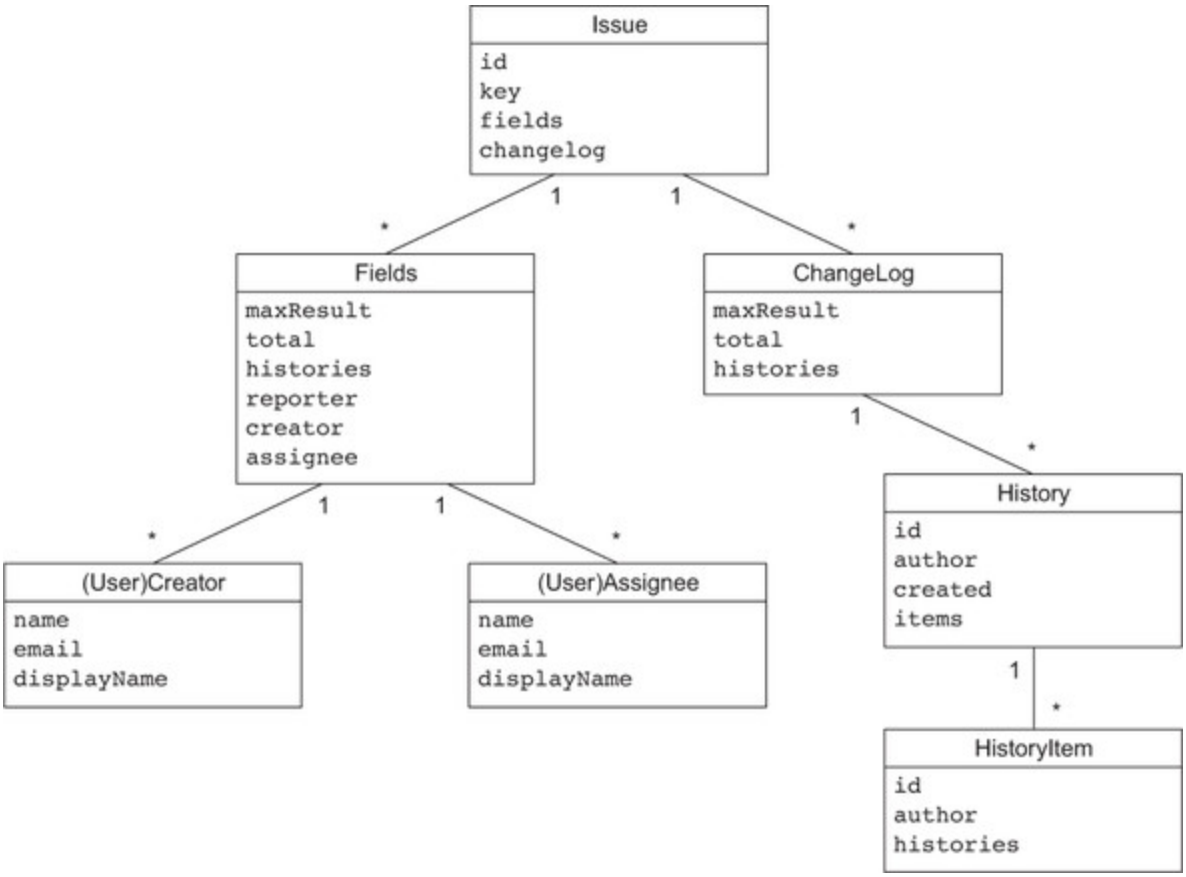


Figure B.4 paints a rather complex picture of the domain structure that gets sent back. The `Fields` object in the response represents all the data in a task that has a value. Fields can be as simple as a name-value pair in most cases, but a field can also be an object that has its own set of name-value pairs. The best example is the `User` object used to show the creator and the current assignee of the task; each user has a name, email, display name, and other data associated with it. The `ChangeLog` is another aggregation of objects that represent the history of how the issue has changed over time.

To get data from the source systems, you have a service for each source system that maps the data from the source API back to your domain model. That brings us to the services you'll use to parse the data.

B.1.3. Data collection services