
- ***CLOC*** —The total amount of change in the codebase itself.

The development team was already using ELK for log analysis, and the leadership team decided to use the same system for graphing their data. To do this they needed a way to get data from JIRA and GitHub into EC for indexing and searching.[1]

[1] For more information on EC I recommend *Elasticsearch in Action* (Manning Publications, 2015), www.manning.com/hinman/.

JIRA and GitHub have rich APIs that expose data. The development team decided to take advantage of those APIs with an in-house application that obtained the data they needed and sent it to EC. The high-level architecture is shown in figure 2.4.

Figure 2.4. The component architecture for the system

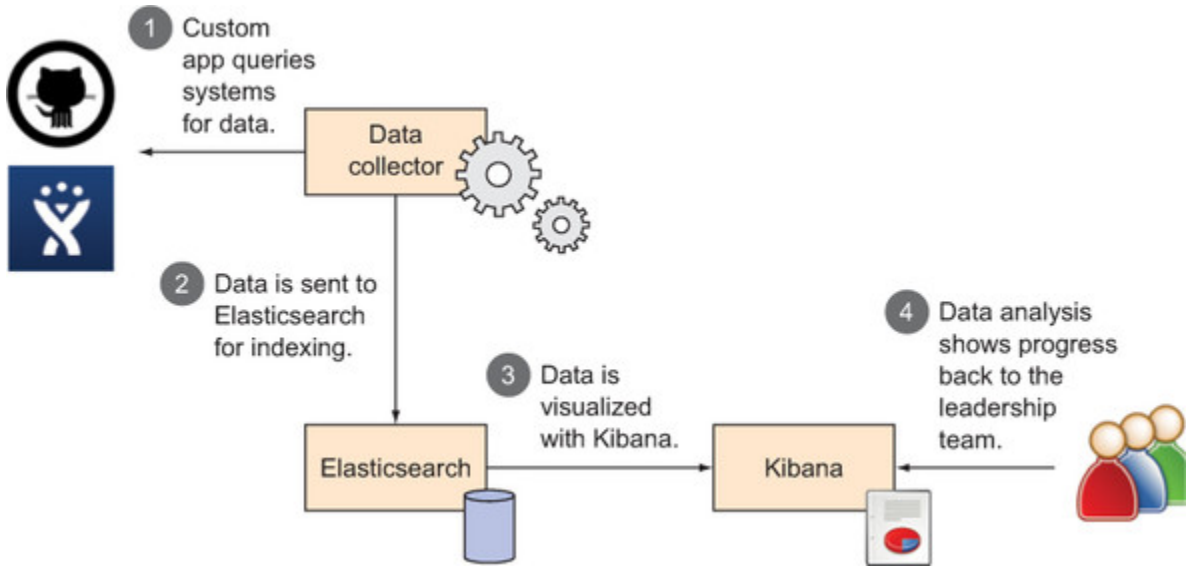

Note

A setup for EC and Kibana can be found in appendix A, and the code for the application that can get data from source systems and index it with EC can be found in appendix B.