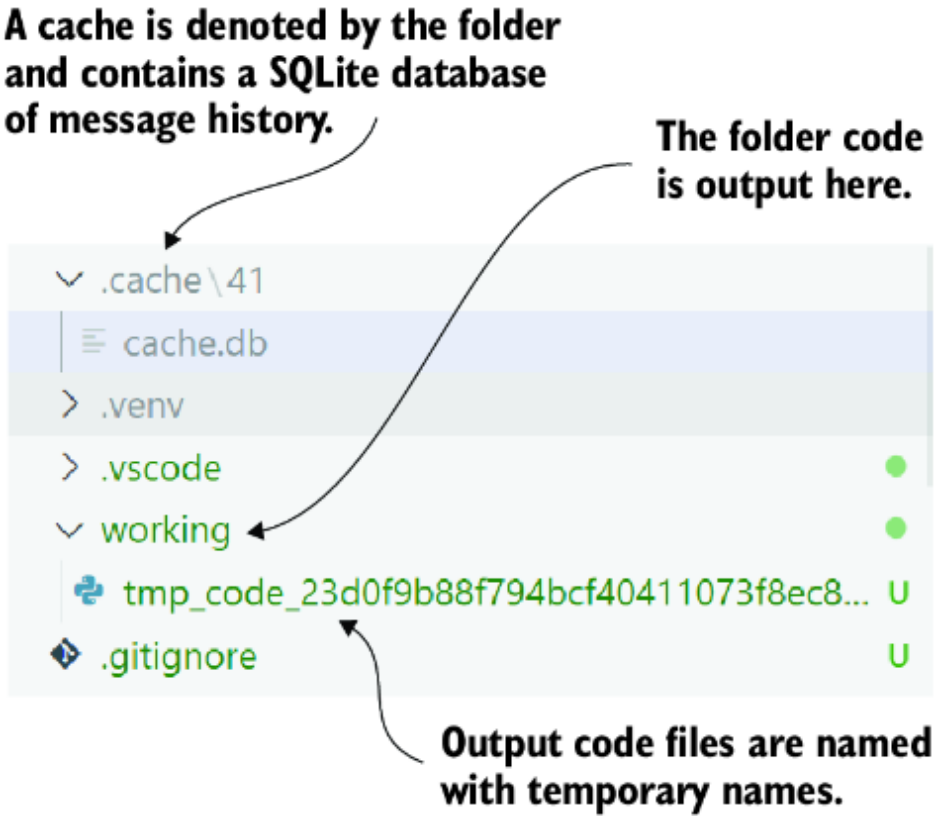


Figure 4.8 AutoGen cache and working folders

In code, you can control the cache folder for your agent's run, as shown in listing 4.9. By wrapping the `initiate_chat` call with the `with` statement, you can control the location and seed for the cache. This will allow you to save and return to long-running AutoGen tasks in the future by just setting the `cache_seed` for the previous cache.

Listing 4.9 Setting the cache folder

```
with Cache.disk(cache_seed=42) as cache:     #1
    res = user_proxy.initiate_chat(
        recipient=engineer,
        message=task,
        max_turns=2,
        summary_method="last_msg",
        cache=cache,      #2
    )
```

#1 Setting the seed_cache denotes the individual location.
#2 Sets the cache as a parameter

This caching ability allows you to continue operations from the previous cache location and captures previous runs. It can also be a great way to demonstrate and inspect how an agent conversation generated the results.