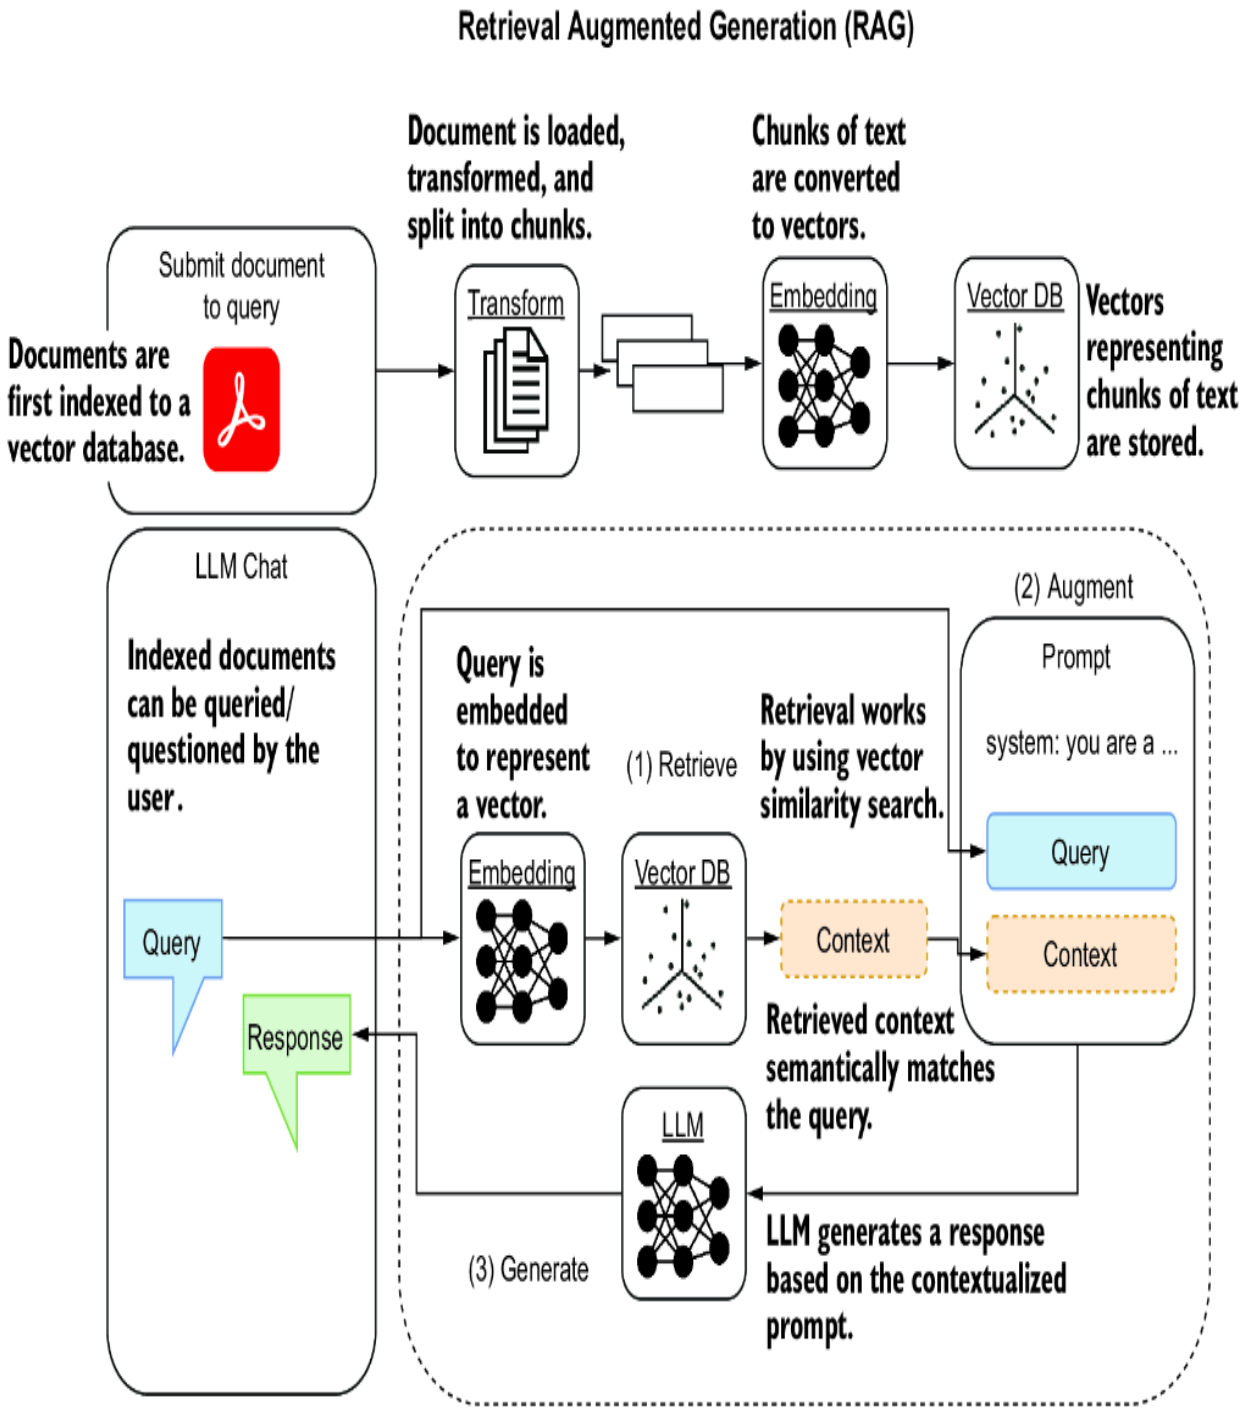



**Figure 8.2 The two phases of RAG: first, documents must be loaded, transformed, embedded, and stored, and, second, they can be queried using augmented generation.**

A user can query previously indexed documents by submitting a query. That query is then embedded into a vector representation to search for similar chunks in the vector database. Content similar to the query is then used as context and populated into the prompt as augmentation. The