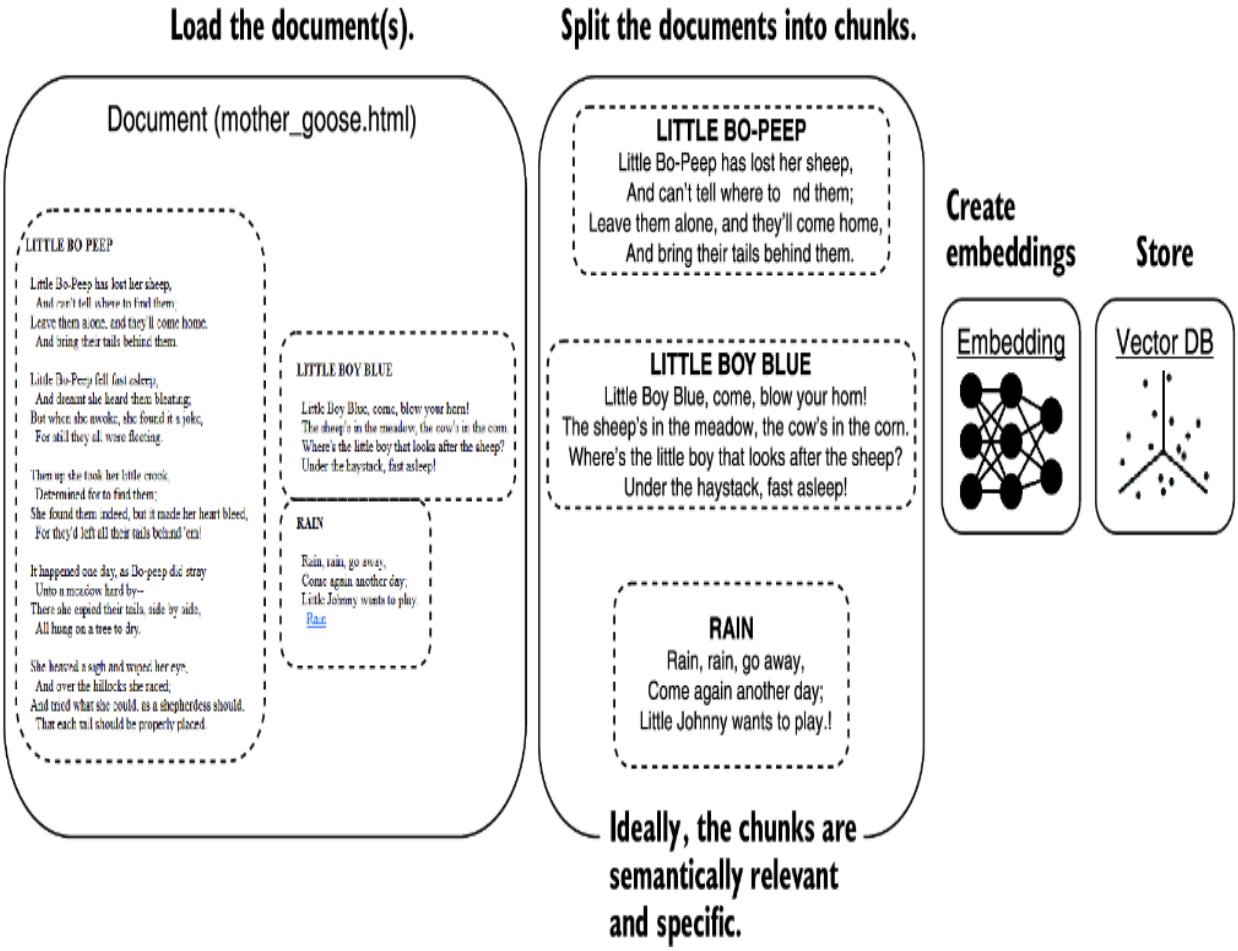


Figure 8.8 How the document would ideally be split into chunks for better semantic and contextual meaning

Ideally, when we split documents into chunks, they are broken down by relevance and semantic meaning. While an LLM or agent could help us with this, we'll look at current toolkit options within LangChain for splitting documents. Later in this chapter, we'll look at a semantic function that can assist us in semantically dividing content for embeddings.

For the next exercise, open `langchain_load_splitting.py` in VS Code, as shown in listing 8.6. This code shows where we left off from listing 8.5, in the previous section. Instead of using the sample documents, we're loading the Mother Goose nursery rhymes this time.