Figure 9.2 OpenAI prompt engineering strategies, broken down by agent component

We just applied simple iteration to improve our prompt. We can extend this example by using a system prompt/message. Figure 9.3 demonstrates the use and role of the system prompt in iterative communication. In chapter 2, we used the system message/prompt in various examples.

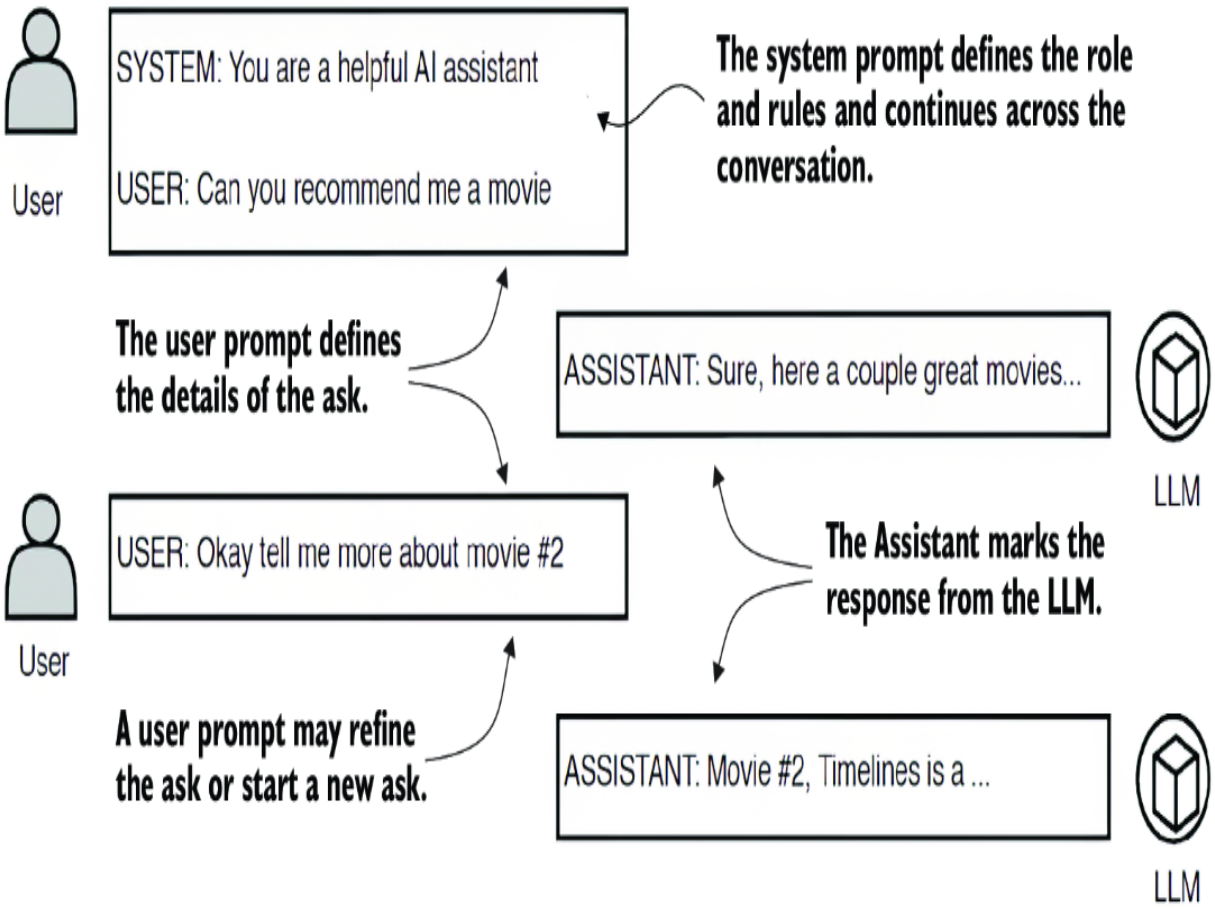


Figure 9.3 The messages to and from an LLM conversation and the iteration of messages

You can also try this in ChatGPT. This time, enter the following prompt and include the word *system* in lowercase, followed by a new line (enter a new line in the message window without sending the message by pressing Shift-Enter):

```
system
```