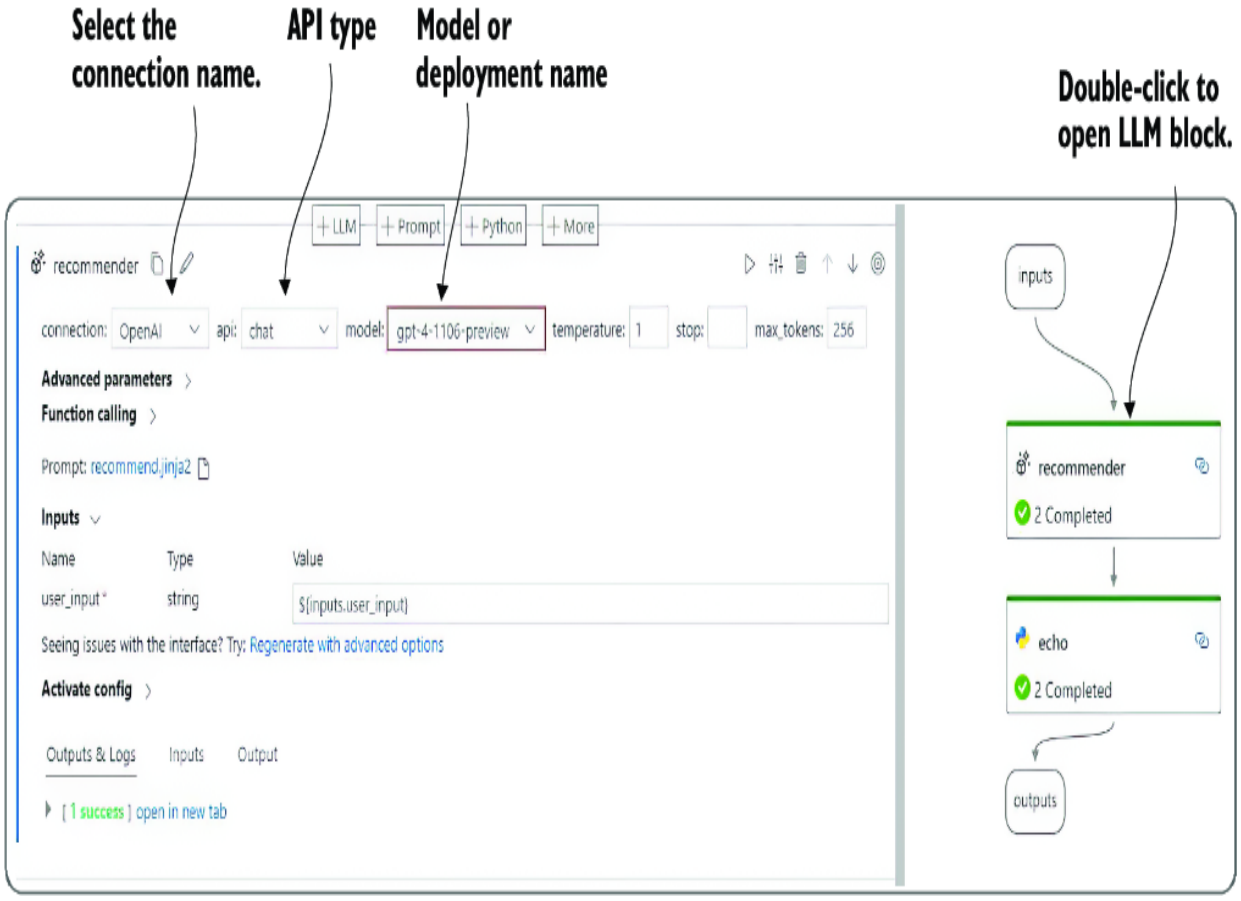


Figure 9.10 Setting the LLM connection details

A prompt flow is composed of a set of blocks starting with an `Inputs` block and terminating in an `Outputs` block. Within this simple flow, the `recommender` block represents the LLM connection and the prompt used to converse with the model. The `echo` block for this simple example echoes the input.

When creating a connection to an LLM, either in prompt flow or through an API, here are the crucial parameters we always need to consider (prompt flow documentation: https://microsoft.github.io/promptflow):

- *Connection* —This is the connection name, but it also represents the service you're connecting to. Prompt flow supports multiple services, including locally deployed LLMs.
- *API* —This is the API type. The options are `chat` for a chat completion API, such as GPT-4, or `completion` for the older completion models, such as the OpenAI Davinci.