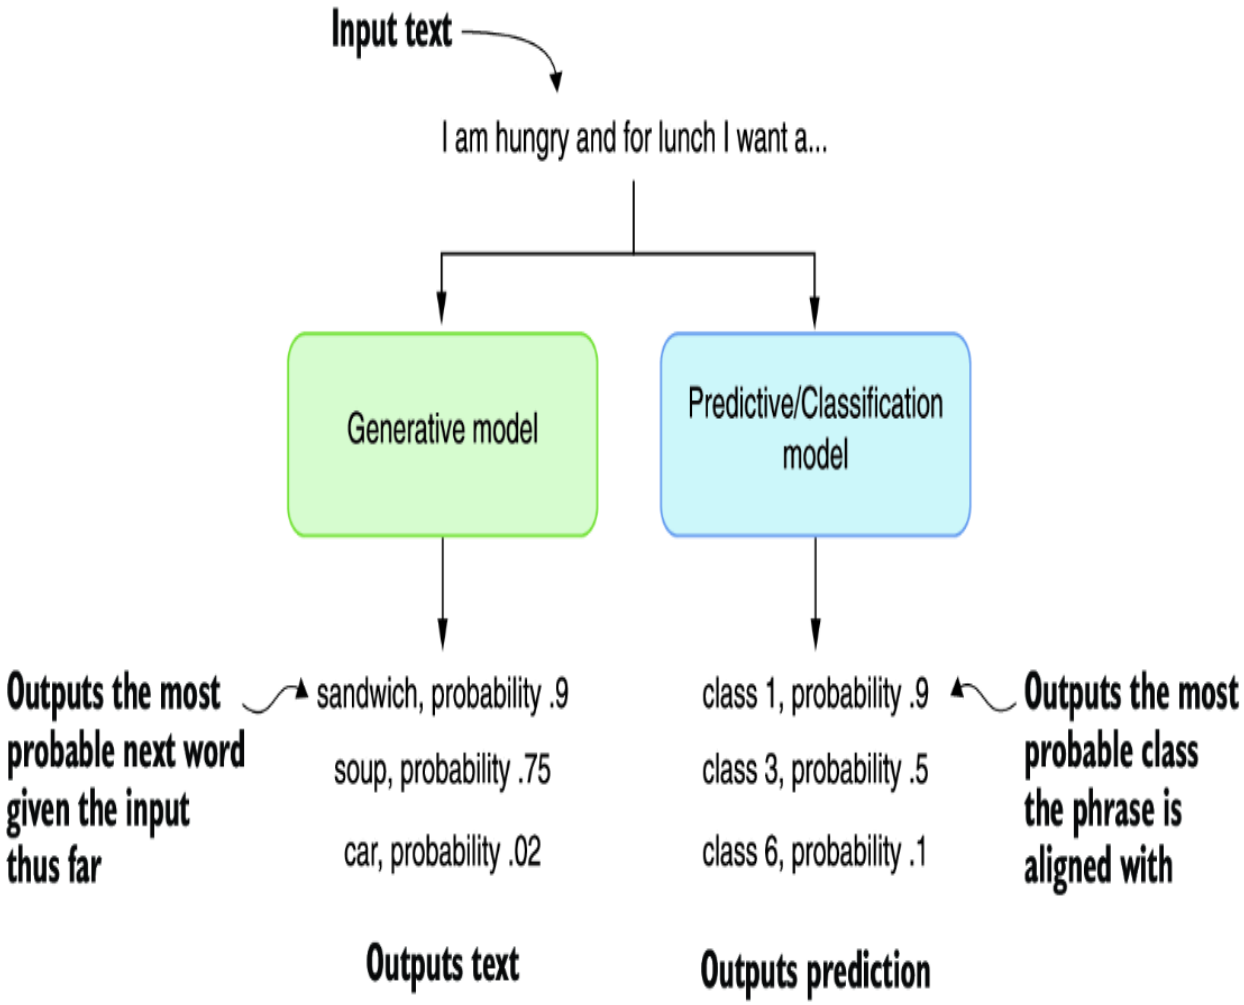


Figure 2.1 The difference between generative and predictive models

We can further define an LLM by its constituent parts, as shown in figure 2.2. In this diagram, *data* represents the content used to train the model, and *architecture* is an attribute of the model itself, such as the number of parameters or size of the model. Models are further trained specifically to the desired use case, including chat, completions, or instruction. Finally, *fine-tuning* is a feature added to models that refines the input data and model training to better match a particular use case or domain.