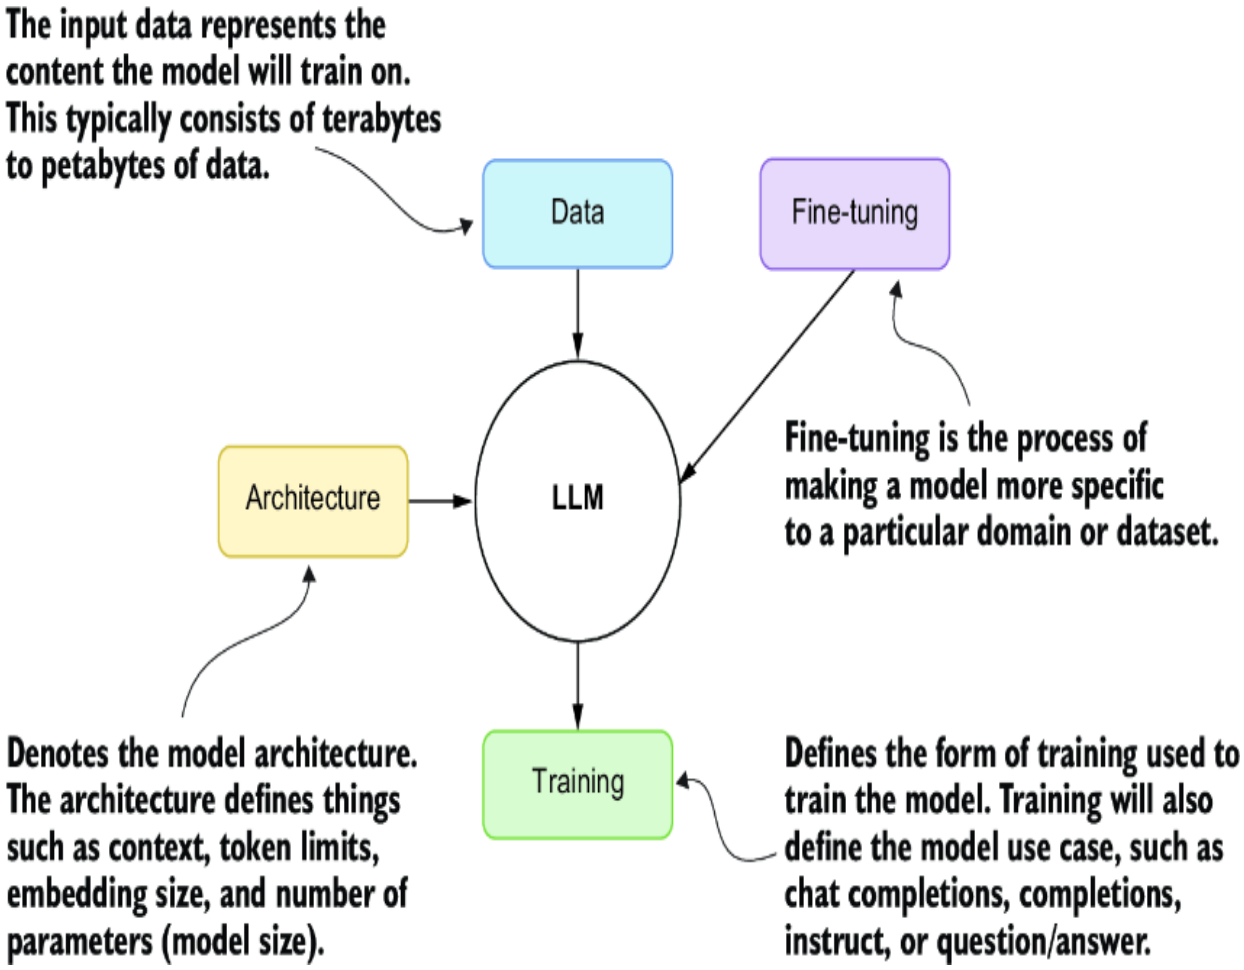


Figure 2.2 The main elements that describe an LLM

The transformer architecture of GPTs, which is a specific architecture of LLMs, allows the models to be scaled to billions of parameters in size. This requires these large models to be trained on terabytes of documents to build a foundation. From there, these models will be successively trained using various methods for the desired use case of the model.

ChatGPT, for example, is trained effectively on the public internet and then fine-tuned using several training strategies. The final fine-tuning training is completed using an advanced form called *reinforcement learning with human feedback* (RLHF). This produces a model use case called chat completions.

Chat completions LLMs are designed to improve through iteration and refinement—in other words, chatting. These models have also been benchmarked to be the best in task completion, reasoning, and planning,