
Use Case (Model Type): Determines the type of model and expected use case. This could be chat completions for a model like ChatGPT.

Model Parameters (Size): Specifics the size of the model in billions of parameters. Larger models typically perform better on general tasks.

Training Input: Specifies the material used to train the model. This can range from everything on the internet to a specific domain Python code.

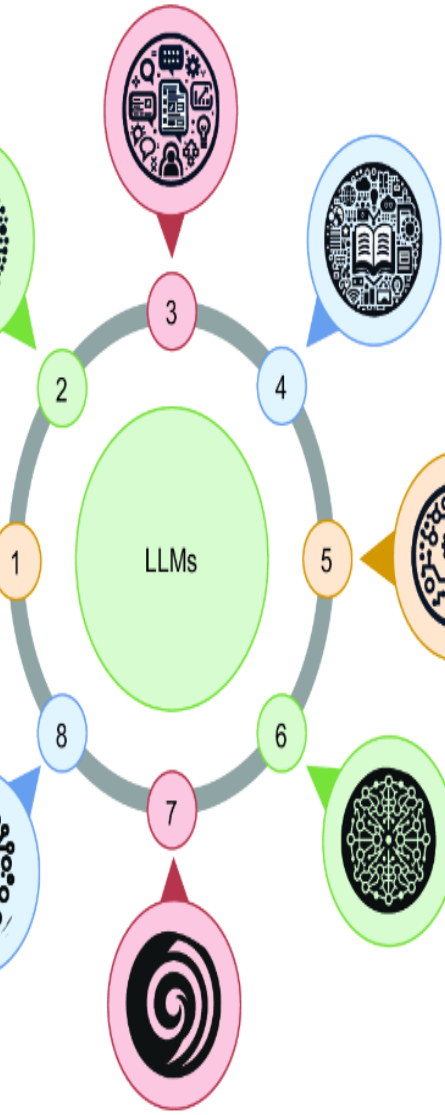

Model Performance: Determines how well a model may perform on a given benchmark, such as answering SAT questions.

Training Method: Specifies how the model is trained and/or fine-tuned. Models like ChatGPT are trained using reinforcement learning with human feedback.

Model Cost (Project Budget): Could represent the price of the service or the cost to host and run a model on your infrastructure.

Context Token Size: Specifies how large the model's context size is in tokens. Large context is important for verbose agent conversations.

Model Speed (Model Deployment): Denotes the speed of the model. OpenAI models marked Turbo are typically faster. For local LLMs, speed will be determined by the infrastructure.