into a `WorkerDoneAdapter` and sends it to the manager, as shown in figure 3.4.

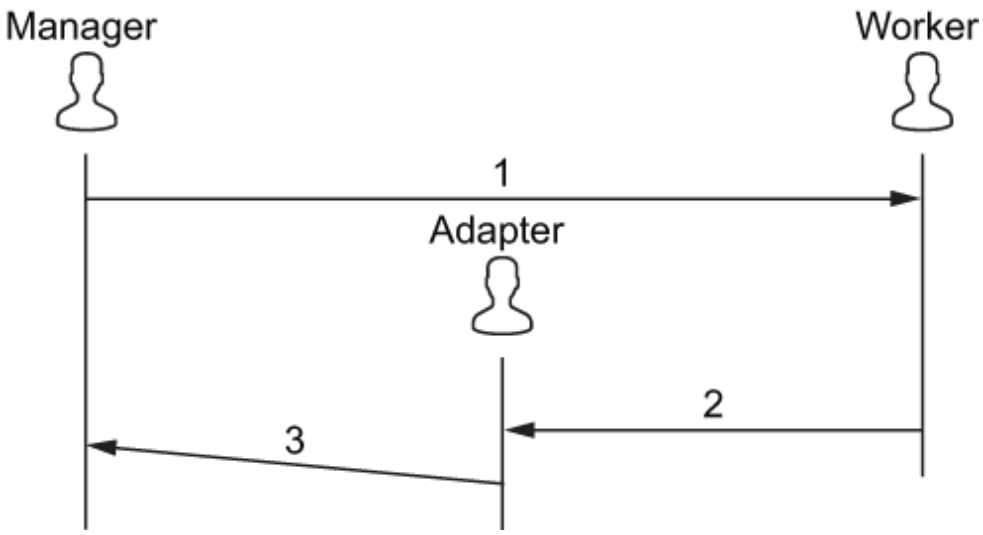


Figure 3.4 Flow of a message sent from the manager to a worker

You create the adapter function in `Behaviors.setup`, so it is created only once. This is shown in the following section.

3.1.6 Delegating

Delegating involves using the adapter function and the worker protocol to send texts from the manager to the workers. The worker protocol has two messages:

- `Parse`—Command containing the string to be parsed and a reference to the actor to reply to
- `Done(text: String)`—Response containing the parsed string so the manager can track what has been done

The worker protocol is as follows: