Following the same structure as in the previous example, you have an app, a guardian, a manager, and workers, but there are also a few differences. The manager no longer tells the worker what to do but asks them, imposing a time limit. The worker spends about 3 seconds parsing the text to simulate complex parsing.

Figure 3.5 shows how the manager asks a worker to parse and waits for the response. If the response comes quickly enough, the manager receives the response in a `Success`; otherwise, it receives an exception in a `Failure`.

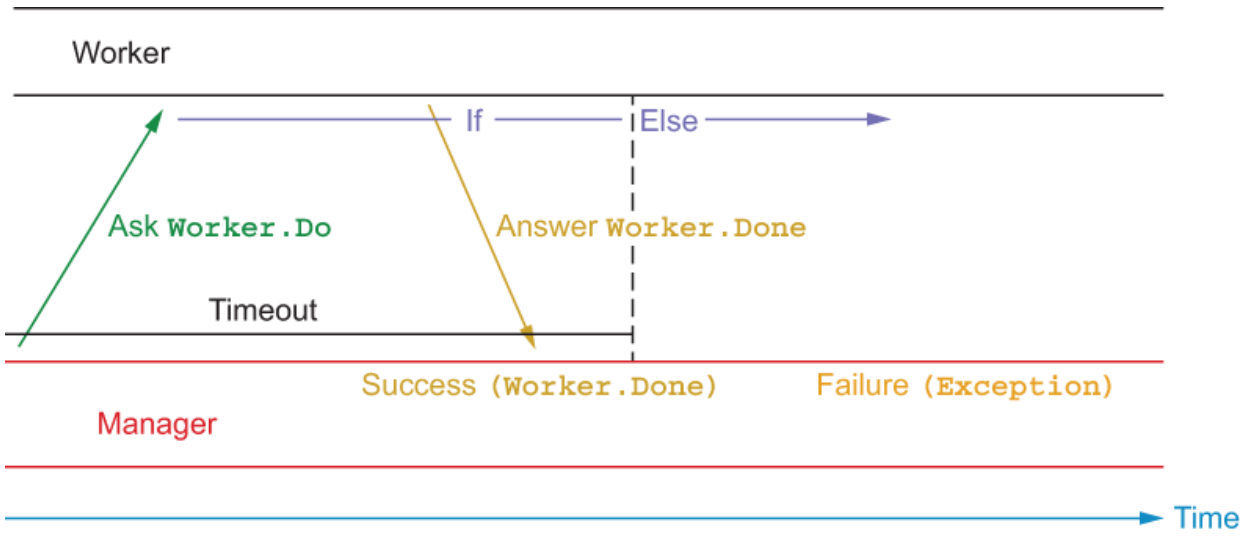


Figure 3.5 Possible outcomes for the manager when it asks the worker to parse a text

The entry point of the application and the guardian are the same as in the previous example and therefore are not covered in this section. As always, let's look at the running application before dealing with the code.