message from the worker to the proxy can no longer reach it. Then the `ActorSystem` takes over, and the message sent to this stopped actor is forwarded to the `deadLetters` actor.

Figure 3.6 represents both cases: success and failure.

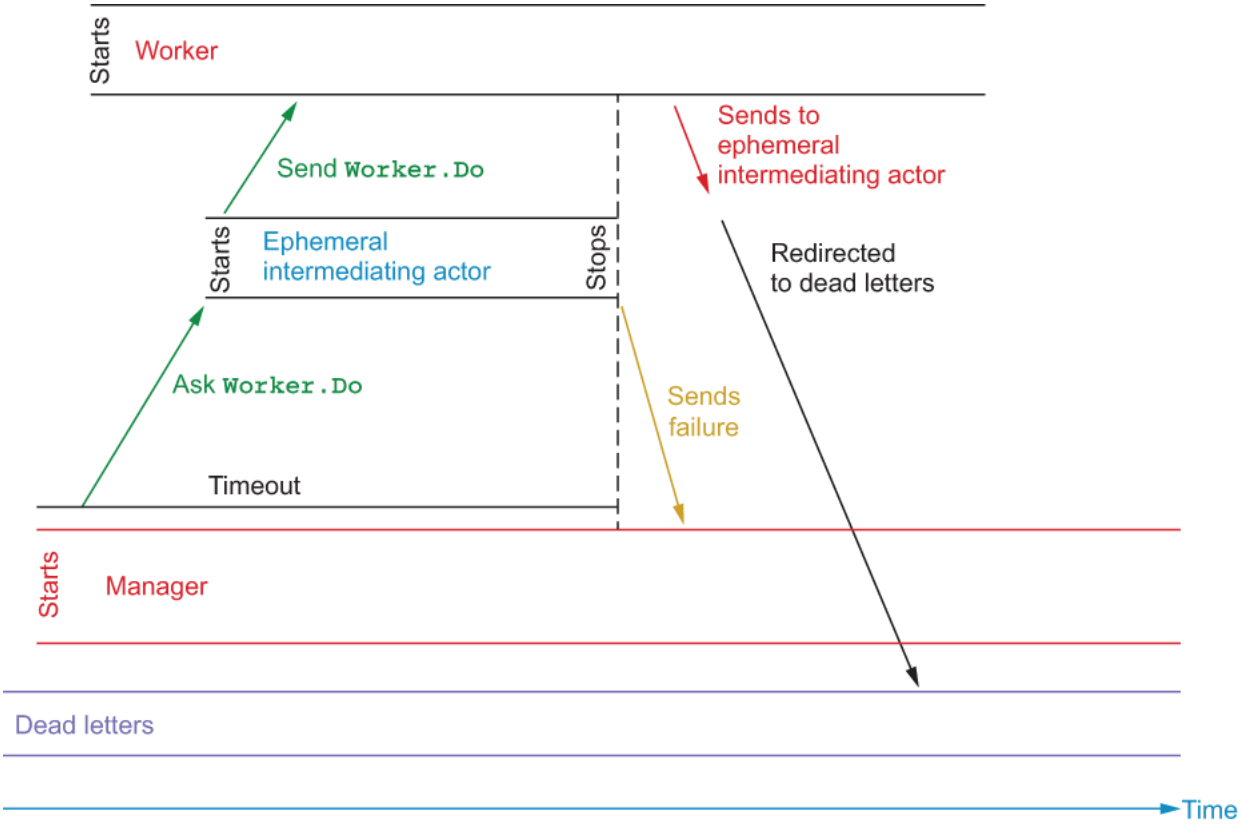


Figure 3.6 Ephemeral intermediate actor lifespan and duties after a timeout

If a message can reach its destination, you have some information about it. But this should be taken with a grain of salt; sending messages to the `deadLetters` actor guarantees only best effort—the delivery guarantee is at-most-once. This means each message is sent only once. Whether it reaches its destination does not matter to the sender, which does not wait for an acknowledgment.