To create this type of test, you use the `ActorTestKit` instead of the `BehaviorTestKit`. The `ActorTestKit` creates a real `ActorSystem`, where each actor has a full `ActorContext` rather than the previous stubbed context. Instead of the `TestInbox`, you now have a `TestProbe` that you use similarly, although it has a richer API. This section looks at some of these new methods, like awaiting an assert, fishing for messages of specific types, and passing code to be executed within a certain time.

Figure 4.2 shows how the `ActorTestKit` is typically used for testing. The actor spec creates a real `ActorSystem` with its usual hierarchy containing the actor under test and a test probe. The test probe acts as a monitor that eventually receives messages as effects of the messages sent to the actor.

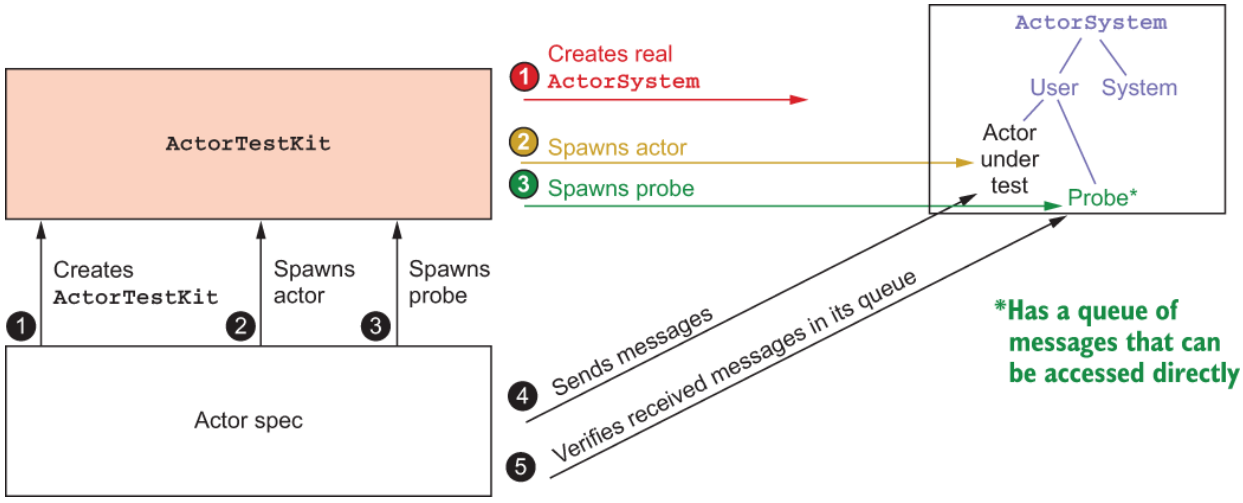


Figure 4.2 Testing components of the `ActorTestKit`

4.3.1 Using probes