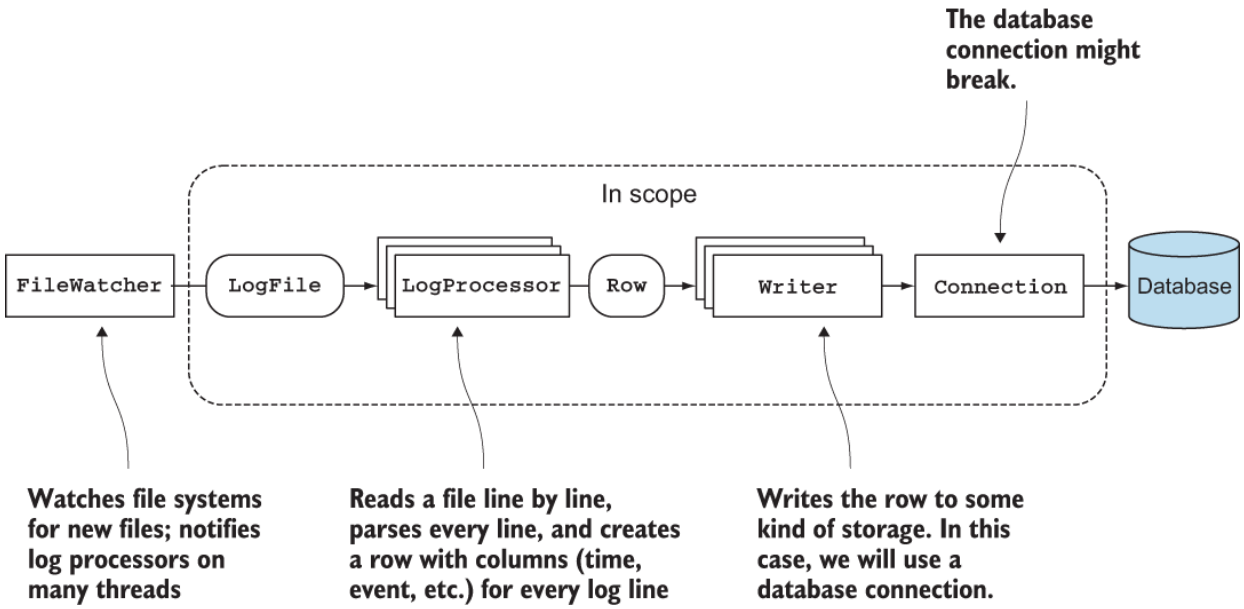


Figure 5.1 Processing logs from the `FileWatcher`, to the `LogProcessor`, to the `Writer`, and to the database

If the database connection breaks, you want to be able to create a new connection to another database and continue writing instead of backing out. If the connection starts to malfunction, you may want to shut it down so that no part of the application uses it anymore. In some cases, you need to reboot the connection to get rid of a temporary bad state. Let's look at the case of using a new connection to the same database with standard exception handling; we'll use pseudocode to illustrate the potential problem areas.

First you set up all the objects that will be used from the threads. After setup, they will be used to process the new files that the file watcher finds. You also set up a database writer that uses a connection (see figure 5.2).