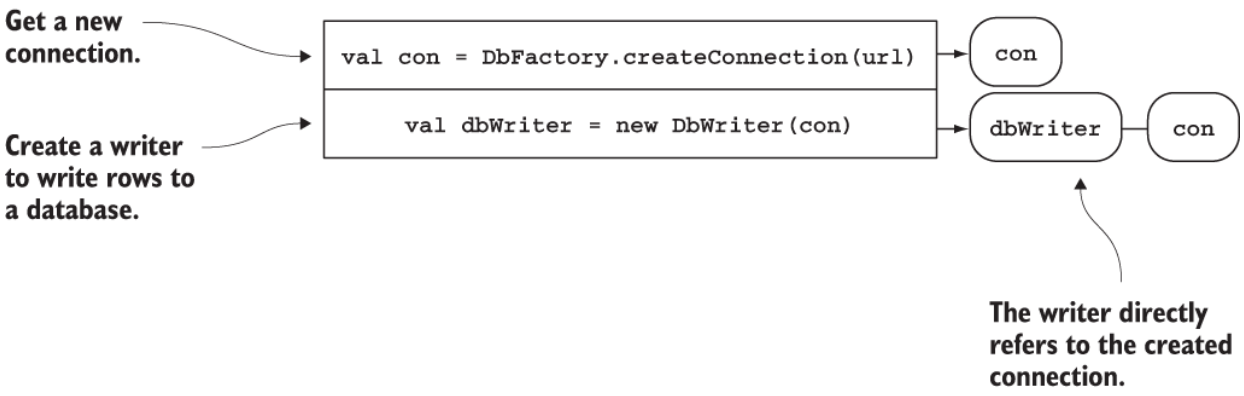


Figure 5.2 Create a writer with a connection.

The dependencies for the writer are passed to the constructor, as you'd expect. The database factory settings, including the different URLs, are passed in from the thread that creates the writer. Next you set up some log processors; each gets a reference to a writer to store rows, as shown in figure 5.3.

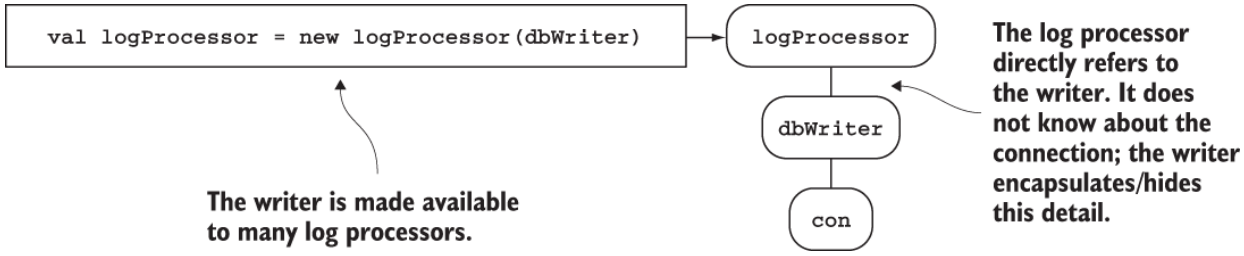


Figure 5.3 Create a log processor using the writer.

The flow shown in figure 5.3 is called from many threads to simultaneously process files found by the file watcher. Figure 5.4 shows a call stack where a `DbBrokenConnectionException` is thrown, indicating that you should switch to another connection. The details of every method are omitted; the diagram shows only where an object eventually calls another object.