approach, you leave the Akka monitoring model and return to an imperative `try/catch`.

Let's look at how things play out in figure 5.7 if an exception to message X occurs with a resume strategy.

The first part—the initialization you have already seen—is a `Behavior.setup`. This behavior wraps the actor's behavior and provides an initialization that is executed when the actor is spawned.

Figure 5.7 shows that when the actor processes message X, it raises an exception X that is forwarded to its supervisor, which is also a behavior. This exception X has no consequences for the actor because the supervisor applies the resume strategy and therefore selects a `Behavior.same` as the next behavior for the actor.

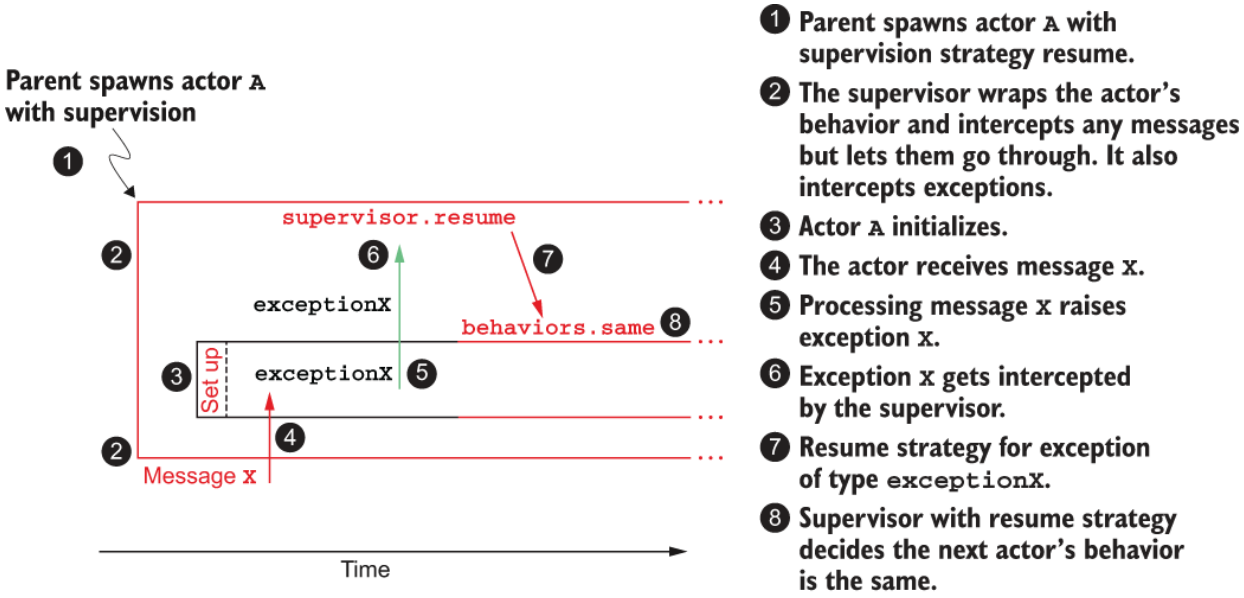


Figure 5.7 Actor processing messages supervised with the resume strategy