This strategy has `PostStop` as an associated signal that the actor can use to respond before it is finally stopped. Figure 5.8 shows what happens with the default supervision strategy after a failed message, along with the `PostStop` signal sent to the actor.

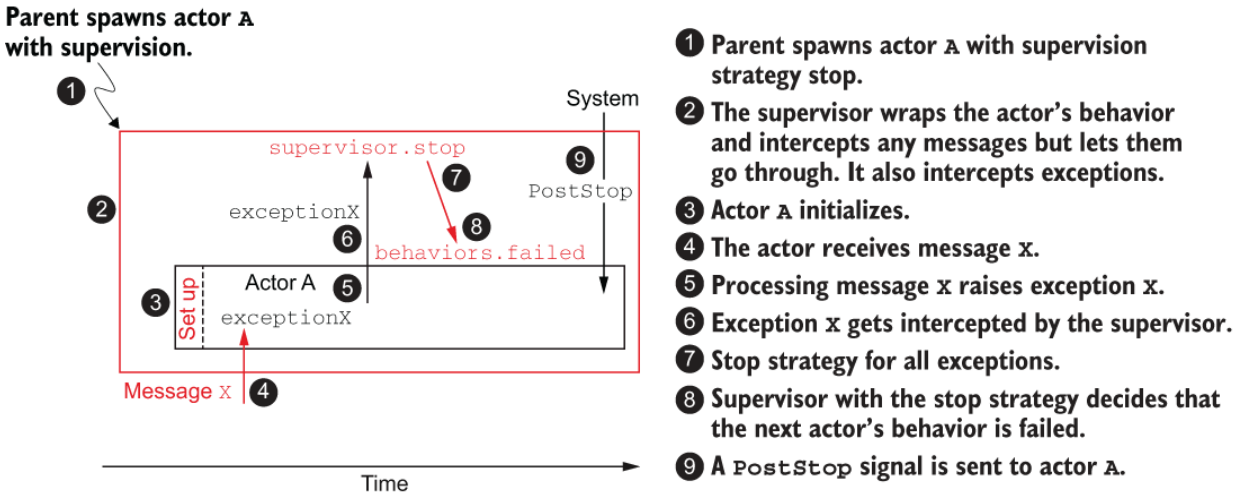


Figure 5.8 An actor with a default supervision strategy is stopped.

In this illustration, the message X in the actor raises an exception X that the supervisor catches. The strategy decides to set `Behaviors.failed` on the actor, and the system sends a `PostStop` signal to the actor to give it one last chance to clean up anything that needs to be closed, such as open connections, files, and expiring resources.

In the following snippet, the `.receiveSignal` method lets you access the `PostStop` signal sent to the actor:

```
import akka.actor.typed.{ Behavior, PostStop }
import akka.actor.typed.scaladsl.Behaviors

object SupervisionExample {
```