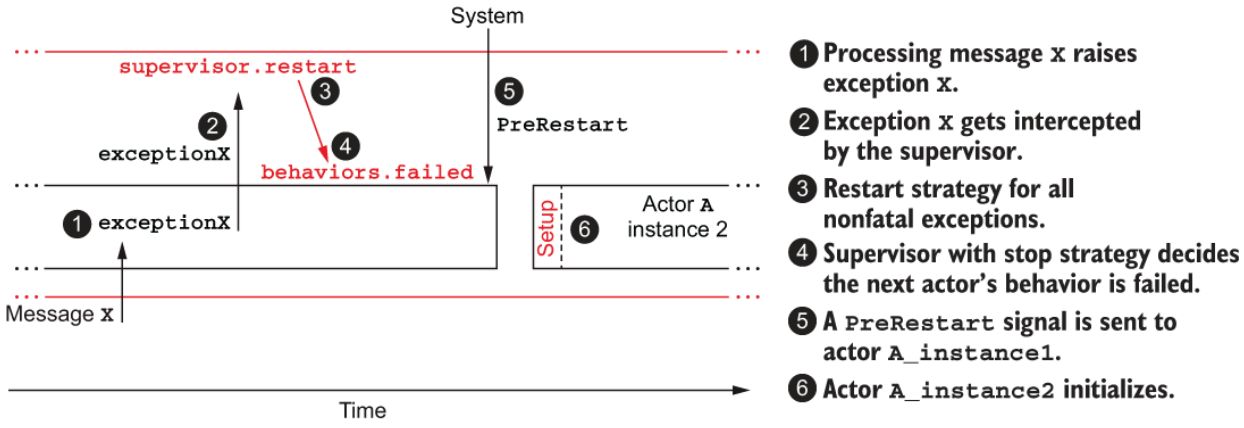


Figure 5.9 Actor with a restart supervision strategy

To make a long story short, the faulty actor receives a `PreRestart` signal and is re-created and reinitialized. For the rest of the system, everything remains the same.

It is important to note that at this point, any state of the actor is lost, at least for a standard actor. Chapter 9 looks at persistent actors that can maintain their state in this and even more difficult scenarios.

Setting up this strategy is as simple as any other:

```
Behaviors.supervise(behavior).onFailure[IndexOutOfBoundException]
➥(SupervisorStrategy.restart)
```

In addition to this strategy, a common configuration is added when monitoring the restart: `.restartWithBackoff`. In situations where the exception is thrown by an external component, such as an HTTP server or a database, it makes sense not to try to reconnect every millisecond. A backoff restart configuration waits a certain amount of time ranging from a minimum to a maximum and increases the waiting exponentially each time it receives an exception.