`ChildFailed` messages contain only the `ActorRef` of the watched actor.

A stopped actor sends the `Terminated` signal if it was not stopped directly due to an exception; otherwise, it sends `ChildFailed`. Note that `ChildFailed` is a subtype of `Terminated`, so the order is important when pattern matching. You must match the `ChildFailed` subtype first; otherwise, the `ChildFailed` signal would also match `Terminated`.

Let's relate this to the logging application at the beginning of the chapter. A file-monitoring (file watcher) process tracks the added files and tells another component to process them, as shown in figure 5.10.

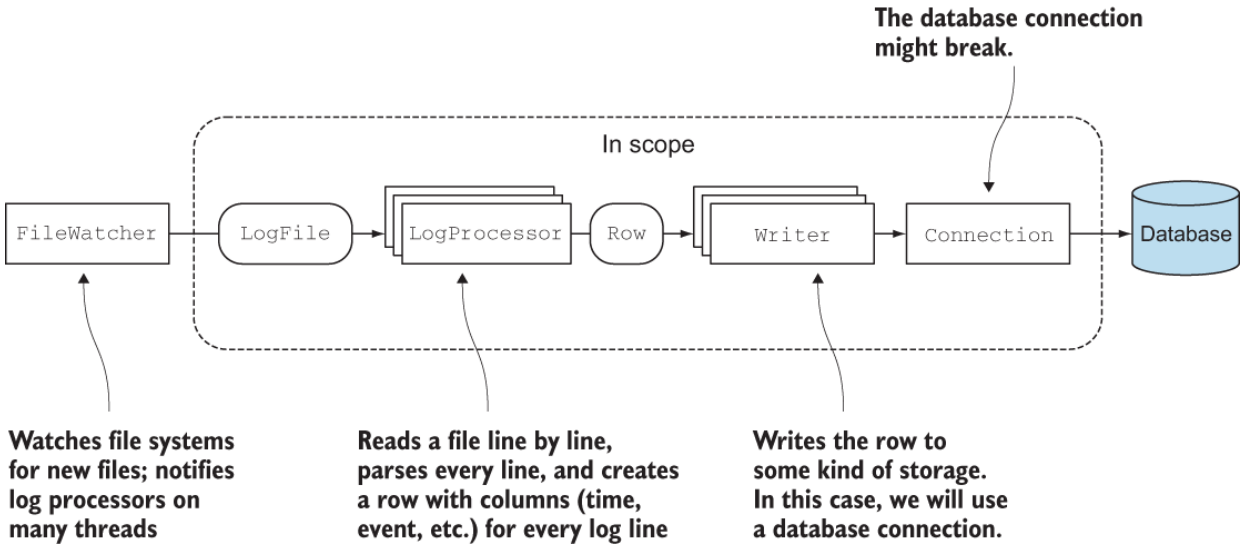


Figure 5.10 Processing logs from the file watcher, to the log processor, to the writer, and to the database