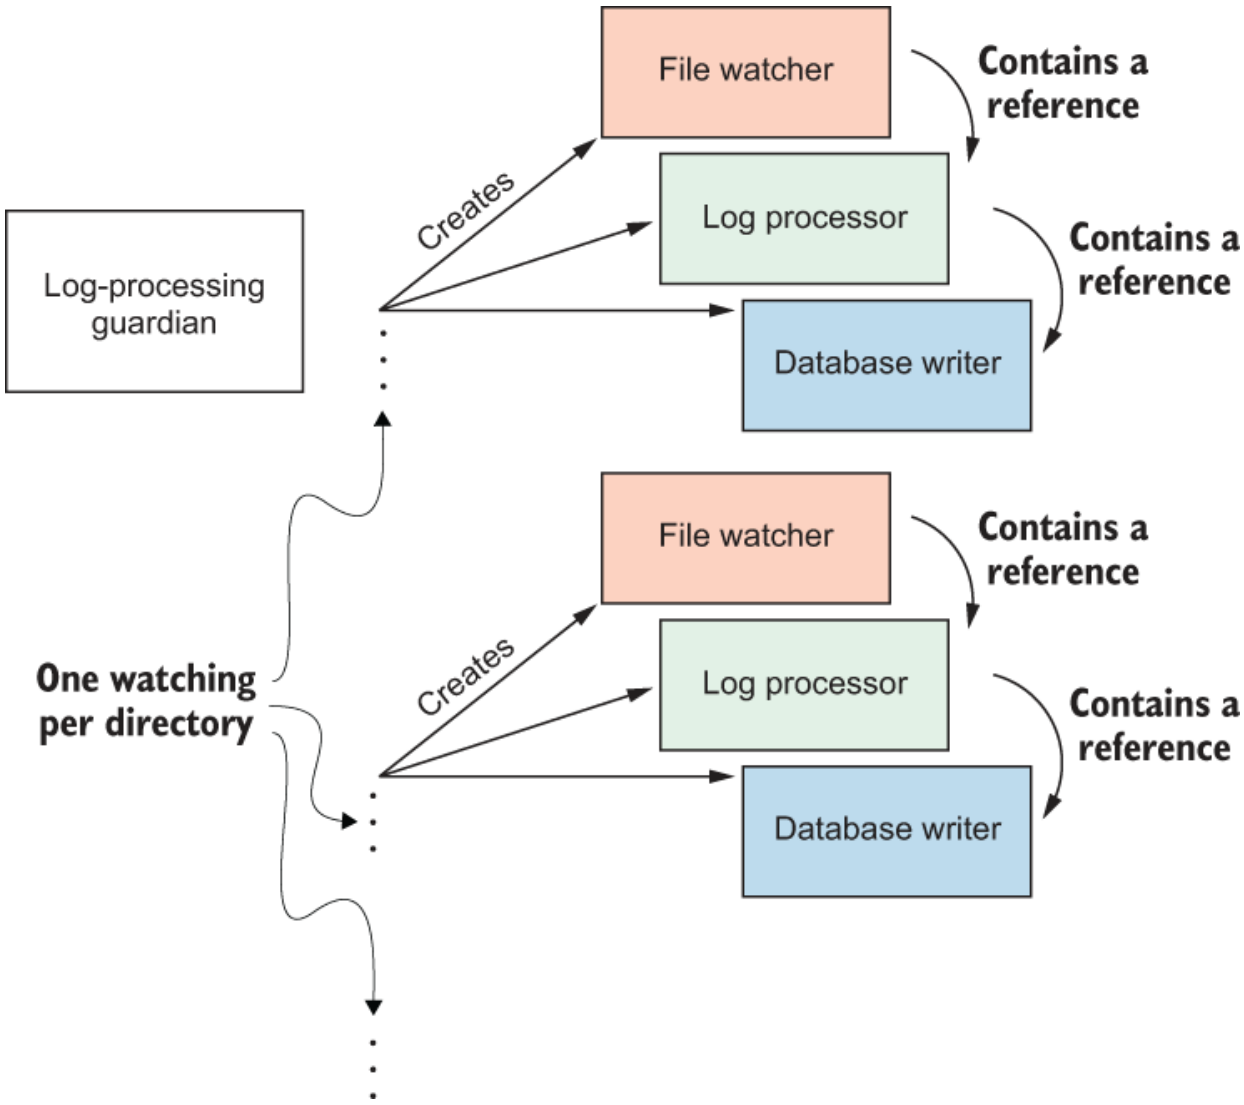


Figure 5.11 Actor creation chain. Option 1: all the actors are created at the guardian level.

Each type of actor knows the `ActorRef` of the next actor to which it sends messages. The file watcher knows about the log processor, which in turn knows about the database writer. Each actor must remain alive and always refer to the next actor in the chain. If an actor in this chain stops, the actor that references it will start sending messages to `deadLetters`, breaking the application. The stop strategy is not an option here; a restart must be used so the same