`ActorRef` can be used repeatedly. Actors must be monitored and respawned as needed. Figure 5.12 shows how things are arranged in this setup.

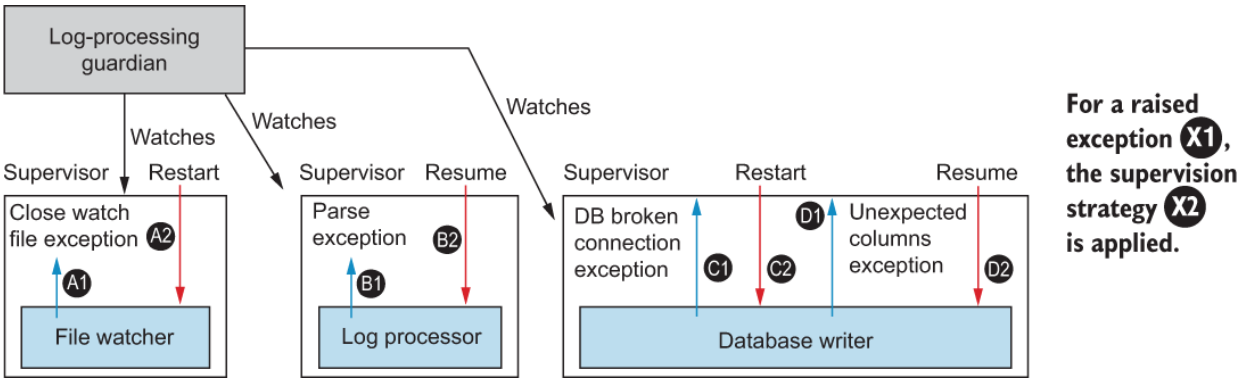


Figure 5.12 Supervision and monitoring for the Akka logging app with creation option 1

A disadvantage is that the guardian must collect the knowledge of the entire application. Monitoring the file watcher and the database writer means the `LogProcessingGuardian` must contain the logic to respond to their signals. If the file watcher is stopped on an unexpected exception, the log processor and the database writer are not stopped because they are not children in the file watcher hierarchy. Let's try again with a different design.

5.5.2 Supervision hierarchy alternative design

Figure 5.13 shows a different approach, a simpler one. The `LogProcessingGuardian` does not create all actors; the file watcher creates one log processor per directory, and the log processor creates a database writer.